

Jc604 U.S. PTO



12/06/99

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

REQUEST FOR FILING CONTINUATION/DIVISIONAL
APPLICATION UNDER 37 C.F.R. §1.53(b)

Box PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Jc564 U.S. PTO

09/454492



12/06/99

Sir:

This is a request for filing a ☐ continuation ☒ divisional application under 37 C.F.R. §1.53(b) of pending Application No. 09/081,012 filed on May 19, 1998, which is a continuation-in-part of Application No. 08/917,761, now issued as U.S. Patent No. 5,910,988 for REMOTE IMAGE CAPTURE WITH CENTRALIZED PROCESSING AND STORAGE, by the following named inventor:

(a) Full Name Claudio R. BALLARD

☒ The entire disclosure for the prior application from which a copy of the oath or declaration is supplied herewith is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

☐ This application is being filed by less than all the inventors named in the prior application. In accordance with 37 C.F.R. §1.63(d)(2), the Commissioner is requested to delete the name(s) of the following person or persons who are not inventors of the invention being claimed in this application

(a) Full name _____

1. ☒ Enclosed is a copy of the prior Application No. 09/081,012 as originally filed on May 19, 1998, including:

40 pages of specification;
14 pages of claims including claims 1-53; and
1 page(s) of abstract.

2. ☐ Enclosed is a revised prior application and a copy of the prior executed oath and declaration as filed. No new matter has been added to the revised application.

3. ☒ A copy of the statement(s) claiming small entity status is enclosed as filed in prior Application No. 09/081,012, filed on May 19, 1998.

4. ☒ The filing fee is calculated below ☒ and in accordance with the Preliminary Amendment:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$ 760.00
Total Claims	13	Minus 20 =	0	x \$18.00 =	0
Independent Claims	5	Minus 3 =	0	x \$78.00 =	156.00
If multiple dependent claims are present, add \$260.00					0
Total Application Fee					916.00
If small entity status is claimed, subtract 50% of Total Application Fee					458.00
Add Assignment Recording Fee of \$40.00 if Assignment document is enclosed					0
TOTAL APPLICATION FEE DUE					\$ 458.00

5. ☐ Charge \$_____ to Deposit Account No. 13-0437 for the fee due.
6. ☒ Check No. 667419 in the amount of \$458.00 is enclosed for the fee due.
7. ☒ The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 13-0437. This paper is submitted in triplicate.
8. ☐ Cancel in this application original claims _____ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
9. ☐ Amend the specification by inserting before the first line the sentence: --This application is a ☐ continuation, ☐ divisional, of Application No. _____ filed _____. --
10. ☐ Transfer the drawings from the pending prior application to this application and abandon said prior application as of the filing date accorded this application. A duplicate of this paper is enclosed for filing in the prior application file. (May only be used if signed by person authorized under 37 C.F.R. §1.138 and before payment of the issue fee.)
11. ☒ 11 pages of formal drawings including Figures 1-10 are enclosed.

12. ☐ Priority of Application No. _____ filed on _____ in (country) is claimed under 35 U.S.C. §119.

☐ The certified copy of the priority application
☐ is enclosed
☐ was filed on _____ in prior Application No. _____, filed on _____
☐ has not yet been filed.

13. ☒ A Preliminary Amendment is enclosed.

14. ☒ Also enclosed an Information Disclosure Statement, PTO-1449 Form and copies of 54 U.S. patents.

15. ☒ The original power of attorney in the prior application is enclosed together with a copy of the Supplemental Power of Attorney as filed in parent application Serial No. 09/081,012

- a. ☒ The powers appear in the original papers in the prior application.
b. ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
c. ☐ Recognizes as Associate Attorney _____.
d. ☒ Address all future communications to: (May only be completed by applicant, or attorney of record.)

J. Michael Martinez de Andino
McGuire, Woods, Battle & Boothe, L.L.P.
One James Center
901 East Cary Street
Richmond, Virginia 23219-4030

December 6, 1999
Date

By: Mark A. Taylor
Mark A. Taylor
Registration No. 35,706

Address of Signator:

McGuire, Woods, Battle & Boothe, L.L.P.
One James Center
901 East Cary Street
Richmond, Virginia 23219-4030

☐ inventor(s)
☐ assignee of complete interest
☒ attorney or agent of record
☐ filed under 37 C.F.R. § 1.34(a)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Claudio R. BALLARD

Application No.: To Be Assigned

Group Art Unit:

Filed: Herewith

Examiner:

For: REMOTE IMAGE CAPTURE WITH
CENTRALIZED PROCESSING AND
STORAGE

Attorney Docket No.:
2269-007

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
[37 CFR 1.9(f) and 1.27(c)] - Small Business Concern

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

I hereby declare that I am an official of the small business concern empowered to act in behalf of the concern identified below:

CSP Holdings, LLC
16 West Neck Court
Lloyd Harbor, New York 11743

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the person employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern and/or there is an obligation under contract or law by the inventor(s) to convey rights to the small business concern with regard to the invention, entitled REMOTE IMAGE CAPTURE WITH CENTRALIZED PROCESSING AND STORAGE by Claudio R. BALLARD described in the specification filed herewith.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

FULL NAME: _____

ADDRESS: _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. [37 CFR 1.28 (b)]

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, and patent issuing thereon, or any patent to which this verified statement is directed.

Send correspondence to:

PENNIE & EDMONDS LLP
1667 K Street, N.W.
Washington, D.C. 20006

Direct telephone calls to:

PENNIE & EDMONDS LLP
(202) 496-4400

Name:

Title:

Address:

Signature:

Date:

PRESIDENT

Claudio R Ballard

May 18, 1998

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re US Patent Application of:)	
)	
Claudio R. BALLARD)	
)	
Serial No.: Unassigned)	Group Art Unit: Unassigned
)	
Filing Date: December 6, 1999)	Examiner: Unassigned
)	
Title: REMOTE IMAGE CAPTURE)	
WITH CENTRALIZED)	
PROCESSING AND STORAGE)	

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to the examination of the present application, please amend the above-identified patent application as follows:

IN THE SPECIFICATION:

Kindly amend the specification as follows:

On page 1, after the title of the invention, insert the following information:

-- CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a divisional of U.S. Patent Application Serial No. 09/081,012 which was filed on May 19, 1998, which is a continuation-in-part of U.S. Patent Application Serial No. 08/917,761 which was filed on August 27, 1997 and has now issued as U.S. Patent No. 5,910,988. --

IN THE CLAIMS:

Please cancel claims 1-41 and 51-53 without prejudice or disclaimer and amend the following claims:

42. (Amended) A communication network for the transmission of data within and between one or more remote data processing subsystems, at least one intermediate data collecting subsystem and at least one central subsystem forming a tiered architecture wherein each of said at least one central data processing subsystem communicate with a corresponding some of said at least one data collecting subsystem and each of said at least one data collecting subsystem communicate with a corresponding some of said one or more data processing subsystems, said data processing subsystem including an imaging subsystem for capturing images of checks, comprising:

at least one first local area network for transmitting data including a payer bank's identification number, a payer bank's routing number, a payer bank's routing information, a payer's account number, a payer's check, a payer bank's draft, a check amount, a payee bank's identification number, a payee bank's routing information, and a payee's account number, within a corresponding one of said one or more remote subsystems;

at least one second local area network for transmitting data within a corresponding one of said at least one intermediate subsystem;

at least one third local area network for transmitting data within a corresponding one of said at least one central subsystem; and

at least one wide area network for transmitting data between said one or more remote subsystems, said at least one intermediate subsystem and said at least one central subsystem.

46. (Amended) A method for transmitting data within and between one or more remote subsystems, at least one intermediate subsystem and at least one central subsystem in a tiered manner wherein each of the central subsystems communicate with at least one [a corresponding some of the] intermediate subsystem[s] and each of the intermediate subsystems communicate with at least one [a corresponding some of the] remote subsystem[s] comprising the steps of:

capturing an image of checks and extracting data therefrom, said data including a payer bank's identification number, a payer bank's routing number, a payer bank's routing information, a payer's account number, a payer's check, a payer bank's draft, a check amount, a payee bank's identification number, a payee bank's routing information, and a payee's account number, and further including:

transmitting data within the remote locations;
transmitting data from each remote location to a corresponding intermediate location;
transmitting data within the intermediate locations;
transmitting data from each intermediate location to corresponding central locations;
and
transmitting data within the central locations.

Please add new claims 54 -57 as follows:

-- 54. A communication network for the transmission of data within and between one or more remote data processing subsystems, at least one intermediate data collecting subsystem and at least one central subsystem forming a tiered architecture wherein each of said at least one central data processing subsystem communicate with a corresponding some of said at least one data collecting subsystem and each of said at least one data collecting subsystem communicate with a corresponding some of said one or more data processing subsystems, said data processing subsystem including an imaging subsystem for capturing images of checks and verifying the checks, comprising:

at least one first local area network for transmitting data within a corresponding one of said one or more remote subsystems;

at least one second local area network for transmitting data within a corresponding one of said at least one intermediate subsystem;

at least one third local area network for transmitting data within a corresponding one of said at least one central subsystem; and

at least one wide area network for transmitting data between said one or more remote subsystems, said at least one intermediate subsystem and said at least one central subsystem.

55. A method for transmitting data within and between one or more remote subsystems, at least one intermediate subsystem and at least one central subsystem in a tiered manner wherein each of the central subsystems communicate with intermediate subsystem and each of the intermediate subsystems communicate with at least one remote subsystem comprising the steps of:

capturing an image of checks and extracting data therefrom;
verifying the checks;
transmitting data within the remote locations;
transmitting data from each remote location to a corresponding intermediate location;
transmitting data within the intermediate locations;
transmitting data from each intermediate location to corresponding central locations;
and
transmitting data within the central locations.

56. A method for central management, storage and verification of remotely captured paper transactions from documents and receipts comprising the steps of
capturing and sending the paper transaction data at one or more locations;
managing the capturing and sending of the transaction data;
collecting, processing, sending and storing the transaction data at a central location;
managing the collecting, processing, sending and storing of the captured transaction at a central location, including comparing captured transaction data to stored transaction data for verification; and
transmitting the transaction data within and between the remote location(s) and the central location.

57. A method for central management, storage and verification of remotely captured paper transactions from documents and receipts according to claim 56 wherein said step of managing the collecting, processing, sending and storing further comprises the step of performing said paper transaction by transferring funds electronically from a payer bank to a payee bank. --

REMARKS

By the present Preliminary Amendment, the specification has been amended to include a cross-reference to all related applications. Claims 1-41 and 51-53 have been canceled without prejudice or disclaimer, certain of the claims have been amended as amended in the parent

application and new claims 54-57 have been added to define the present invention with greater particularity. Claims 56 and 57 represent claims 51 and 53 rewritten in independent form.

Favorable consideration is respectfully requested.

Should any questions arise concerning this application, the Examiner is invited to contact the undersigned attorney at the telephone number provided below.

Respectfully Submitted,

By: Mark A. Taylor
Mark A. Taylor
Registration No. 35,706

McGuire, Woods, Battle & Boothe LLP
One James Center
901 East Cary Street
Richmond, VA 23219-4030
(804) 775-4338

Date: December 6, 1999

**REMOTE IMAGE CAPTURE
WITH CENTRALIZED PROCESSING AND STORAGE**

FIELD OF THE INVENTION

5 This invention relates generally to the automated processing of documents and electronic data from different applications including sale, business, banking and general consumer transactions. More particularly, it pertains to an automated system to retrieve transaction data at remote
10 locations, to encrypt the data, to transmit the encrypted data to a central location, to transform the data to a usable form, to generate informative reports from the data and to transmit the informative reports to the remote locations.

BACKGROUND

15 This invention involves the processing of documents and electronic data which are generated, for example, from sale, business and banking transactions including credit card transactions, smart card transactions, automated teller
20 machine (ATM) transactions, consumer purchases, business forms, W2 forms, birth certificates, deeds and insurance documents.

 The enormous number of paper and electronic records generated from documents and electronic data from sale,
25 business and banking transactions contain valuable information. First, these paper and electronic records contain information which can be used to verify the accuracy of the records maintained by consumers, merchants and bankers. For example, customers use paper receipts of sale
30 and banking transactions to verify the information on the periodic statements which they receive from their bank or credit card institution. Merchants use paper receipts to record sale transactions for management of customer complaints. Taxpayers use paper receipts to record tax
35 deductible contributions for use in their tax return preparation. Employees use paper receipts to record business expenses for preparation of business expense forms.

Paper and electronic records also contain information which can be used for market analysis. For example, manufacturers and retailers can determine consumer preferences in different regions as well as trends in
5 consumer preferences from the information contained in paper and electronic records.

However, the maintenance and processing of paper and electronic records presents difficult challenges. First, paper receipts and documents could easily be lost, misplaced,
10 stolen, damaged or destroyed. Further, the information contained in these paper and electronic records cannot be easily processed because it is scattered among individual records. For example, the market trend information contained in a group of sales records retained by merchants cannot
15 easily be determined since this information is scattered among the individual records. Likewise, the tax information contained in a group of paper receipts of sales transactions retained by consumers cannot easily be processed.

Previous approaches have been proposed to meet the
20 challenges associated with the maintenance and processing of paper and electronic records. For example, data archive service companies store the information from paper receipts and documents acquired from their customers on microfilm or compact disc read only memory (CD-ROM) at a central facility.
25 Customers typically deliver the paper receipts and documents to the central facility. For sensitive documents which cannot leave the customer site, some data archive service companies perform data acquisition and transfer to magnetic tapes at the customer site and deliver the tapes to the
30 central facility.

The approach offered by these data archive service companies have disadvantages. First, the approach is costly and has poor performance because it requires an expensive, time consuming physical transportation of paper receipts or
35 magnetic tapes from the customer site to the central facility. Further, the approach is not reliable as information can be lost or damaged during physical

transportation. The approach also has limited capability as it does not process electronic records along with the paper receipts within a single system.

Other approaches have focused on the elimination of
5 paper receipts and documents. U.S. Patent No. 5,590,038
discloses a universal electronic transaction card (UET card)
or smart card which stores transaction information on a
memory embedded on the card as a substitute for a paper
receipt. Similarly, U.S. Patent No. 5,479,510 discloses a
10 method of electronically transmitting and storing purchaser
information at the time of purchase which is read at a later
time to ensure that the purchased goods or services are
delivered to the correct person.

While these approaches avoid the problems associated
15 with paper receipts, they have other disadvantages. First,
these approaches do not offer independent verification of the
accuracy of the records maintained by consumers, merchants
and bankers with a third party recipient of the transaction
data. For example, if a UET card is lost, stolen, damaged or
20 deliberately altered by an unscrupulous holder after
recording sale or banking transactions, these approaches
would not be able to verify the remaining records which are
maintained by the other parties to the transactions.

Next, these approaches do not have the ability to
25 process both paper and electronic records of transactions
within a single, comprehensive system. Accordingly, they do
not address the task of processing the enormous number of
paper receipts which have been generated from sales and
banking transactions. The absence of the ability to process
30 both paper and electronic records of these approaches is a
significant limitation as paper receipts and documents will
continue to be generated for the foreseeable future because
of concerns over the reliability and security of electronic
transactions and the familiarity of consumers and merchants
35 with paper receipts.

These approaches also have a security deficiency as they
do not offer signature verification which is typically used

on credit card purchases to avoid theft and fraud. For example, a thief could misappropriate money from a UET card holder after obtaining by force, manipulation or theft the user's personal identification number (PIN). Similarly, it is not uncommon for criminals to acquire credit cards in victims' names and make unlawful charges after obtaining the victim's social security number. This becomes a greater concern as that type of personal information becomes available, e.g., on the internet. Also, the signature verification performed manually by merchants for credit card purchases frequently misses forged signatures.

Even if smart cards or UET cards had the ability to store signature and other biometric data within the card for verification, the system would still have disadvantages. First, the stored biometric data on the card could be altered by a card thief to defeat the security measure. Similarly, the biometric data could be corrupted if the card is damaged. Finally, the security measure would be costly at it would require an expensive biometric comparison feature either on each card or on equipment at each merchant site.

Additional biometric verification systems including signature verification systems have been proposed to address the security problem. For example, U.S. Patent 5,657,393 discloses a method and apparatus for verification of handwritten signatures involving the extraction and comparison of signature characteristics including the length and angle of select component lines. In addition, U.S. Patent 5,602,933 discloses a method and apparatus for the verification of remotely acquired data with corresponding data stored at a central facility.

However, none of these verification systems offer general support for transaction initiation, remote paper and electronic data acquisition, data encryption, data communication, data archival, data retrieval, data mining, manipulation and analytic services. Accordingly, there is a need for a single system which offers comprehensive support for the tasks involved in the automated processing of

documents, biometric and electronic data from sale, business, banking and general consumer transactions. Further, there is a need for a single comprehensive system having the reliability, performance, fault tolerance, capacity, cost and security to satisfy the requirements of the retail, business, banking and general consumer industries.

SUMMARY OF THE INVENTION

The invention provides an automated, reliable, high performance, fault tolerant, and low cost system with maximal security and availability to process electronic and paper transactions, and has been named the DataTreasury™ System.

It is an object of the present invention to provide a system for central management, storage and verification of remotely captured electronic and paper transactions from credit cards, smart cards, debit cards, documents and receipts involving sales, business, banking and general purpose consumer applications comprising:

at least one remote data access subsystem for capturing and sending electronic and paper transaction data;

at least one data collecting subsystem for collecting and sending the electronic and paper transaction data comprising a first data management subsystem for managing the collecting and sending of the transaction data;

at least one central data processing subsystem for processing, sending and storing the electronic and paper transaction data comprising a second data management subsystem for managing the processing, sending and storing of the transaction data; and

at least one communication network for the transmission of the transaction data within and between said at least one data access subsystem and said at least one data processing subsystem.

The DataTreasury™ System processes paper and/or electronic receipts such as credit card receipts, Automated Teller Machine (ATM) receipts, business expense receipts and sales receipts and automatically generates reports such as

credit card statements, bank statements, tax reports for tax return preparation, market analyses, and the like.

It is a further object of the DataTreasury™ System to retrieve both paper and electronic transactions at remote
5 locations.

It is a further object of the DataTreasury™ System to employ a scanner and a data entry terminal at a customer site to retrieve data from paper transactions and to enable additions or modifications to the scanned information
10 respectively.

It is a further object of the DataTreasury™ System to provide an input device for retrieving transaction data from the memory of smart cards for independent verification of the records maintained by consumers, merchants and bankers to
15 prevent the loss of data from the loss, theft, damage or deliberate alteration of the smart card.

It is a further object of the DataTreasury™ System to retrieve and process transaction data from DataTreasury™ System anonymous smart cards which are identified by an
20 account number and password. Since DataTreasury™ System anonymous smart card transactions can be identified without the customer's name, a customer can add money to the DataTreasury™ System anonymous smart card and make expenditures with the card with the same degree of privacy as
25 cash acquisitions and expenditures.

It is a further object of the DataTreasury™ System to retrieve customer billing data from employee time documents and to generate customer billing statements from the billing data.

30 It is a further object of the DataTreasury™ System to initiate electronic transactions including transactions on the internet and to provide identification verification by capturing and comparing signature and biometric data.

35 It is a further object of the DataTreasury™ System of the invention to process electronic and paper transactions with a tiered architecture comprised of DataTreasury™ System

Access Terminals (DATs), DataTreasury™ System Access Collectors (DACs) and DataTreasury™ System Processing Concentrators (DPCs).

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

These and other objects and features of the invention will be more clearly understood from the following detailed description along with the accompanying drawing figures, wherein:

- 10 FIG. 1 is a block diagram showing the three major operational elements of the invention: the DataTreasury™ System Access Terminal (DAT), the DataTreasury™ System Access Collector (DAC) and the DataTreasury™ System Processing Concentrator (DPC);
- 15 FIG. 2 is a block diagram of the DAT architecture;
 FIG. 3a is a flow chart describing image capture by a DAT;
 FIG. 3b displays a sample paper receipt which is processed by the DAT;
- 20 FIG. 4 is a block diagram of the DAC architecture;
 FIG. 5 is a flow chart describing the polling of the DATs by a DAC;
 FIG. 6 is a block diagram of the DPC architecture;
 FIG. 7 is a flow chart describing the polling of the
- 25 DACs by the DPC;
 FIG. 8 is a flow chart describing the data processing performed by the DPC; and
 FIG. 9 is a flow chart describing the data retrieval performed by the DPC; and
- 30 FIG. 10 is a flow chart describing the use of the DataTreasury™ system to process personal checks.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

- FIG. 1 shows the architecture of the DataTreasury™
35 System 100. The DataTreasury™ System 100 has three operational elements: the DataTreasury™ System Access Terminal (DAT) 200 (the remote data access subsystem), the

DataTreasury™ System Access Collector (DAC) 400 (the intermediate data collecting subsystem), and the DataTreasury™ System Processing Concentrator (DPC) 600 (the central data processing subsystem).

5 The DataTreasury™ System 100 architecture consists of three tiers. At the bottom tier, the DATs 200 retrieve data from the customer sites. At the next tier, the DACs 400 poll the DATs 200 to receive data which accumulates in the DATs 200. At the top tier, the DPCs 600 poll the DACs 400 to
10 receive data which accumulates in the DACs 400. The DPCs 600 store the customer's data in a central location, generate informative reports from the data and transmit the informative reports to the customers at remote locations.

In the preferred embodiment, the DataTreasury™ System
15 100 complies with the Price Waterhouse SAS70 industry standard. Specifically, the DataTreasury™ System 100 meets the software development standard, the system deployment standard and the reliability standard specified by Price Waterhouse SAS70. By adhering to the Price Waterhouse SAS70
20 standard, the DataTreasury™ System 100 provides the security, availability and reliability required by mission critical financial applications of banks and stock brokerage companies.

As is known to persons of ordinary skill in the art, the
25 DataTreasury™ System 100 could also use other software development standard, other system deployment standards and other reliability standards as long as adherence to these alternative standards provides the security, availability and reliability required by mission critical financial
30 applications.

FIG. 2 shows a block diagram of the DAT 200 architecture. DATs 200 are located at customer sites. The DataTreasury™ System 100 customers include merchants, consumers and bankers. The DATs 200 act as the customer
35 contact point to the suite of services provided by the DataTreasury™ System 100. In the preferred embodiment, the DAT 200 is custom designed around a general purpose thin

client Network Computer (NC) which runs SUN Microsystem's
JAVA/OS operating system. The custom designed DAT 200
comprises a DAT scanner 202, a DAT modem 204, DAT digital
storage 206, a DAT controller 210 (workstation), a DAT card
5 interface 212, an optional DAT printer 208 and a signature
pad 214.

As is known to persons of ordinary skill in the art, the
DAT 200 could also be custom designed around a general
purpose network computer running other operating systems as
10 long as the chosen operating system provides support for
multiprocessing, memory management and dynamic linking
required by the DataTreasury™ System 100.

The DAT scanner 202 scans a paper receipt and generates
a digital bitmap image representation called a Bitmap Image
15 (BI) of the receipt. In the preferred embodiment, the DAT
scanner 202 has the ability to support a full range of image
resolution values which are commonly measured in Dots Per
Inch (DPI). Next, the DAT scanner 202 has the ability to
perform full duplex imaging. With full duplex imaging, a
20 scanner simultaneous captures both the front and back of a
paper document. The DAT scanner 202 can also support gray
scale and full color imaging at any bit per pixel depth
value. The DAT scanner 202 also supports the capture of
hand-written signatures for identity verification.

25 In addition to scanning images and text, the DAT scanner
202 also scans DataGlyph™ elements, available from Xerox
Corporation. As is known to persons of ordinary skill in the
art, the Xerox DataGlyph™ Technology represents digital
information with machine readable data which is encoded into
30 many, tiny, individual glyph elements. Each glyph element
consists of a 45 degree diagonal line which could be as short
as 1/100th of an inch depending on the resolution of the
scanning and printing devices. Each glyph element represents
a binary 0 or 1 depending on whether it slopes downward to
35 the left or the right respectively. Accordingly, DataGlyph™
elements can represent character strings as ASCII or EBCDIC
binary representations. Further, encryption methods, as

known to persons of ordinary skill in the art encrypt the data represented by the DataGlyph™ Technology.

The use of glyph technology in the DataTreasury™ System 100 improves the accuracy, cost and performance of the system. Xerox DataGlyph™ Technology includes error correction codes which can be referenced to correct scanning errors or to correct damage to the document caused by ink spills or ordinary wear. DataGlyph™ Technology also leads to decreased system cost since the system will require less manual intervention for data entry and correction because of the improved accuracy associated with DataGlyph™ elements. Since DataGlyph™ elements represent a large amount of information in a small amount of space, the DAT scanner 100 will require a small amount of time to input a large amount of information.

The DAT card interface 212 and the DAT signature pad 214 along with the internet and telephone access through the DAT modem 204 enable the DataTreasury™ System 100 customer to initiate secure sale and banking transactions via the internet or telephone with the DAT 200 using a variety of cards including debit cards, smart cards and credit cards. After selecting a purchase or a banking transaction through a standard internet interface, the DataTreasury™ System 100 customer inserts or swipes the debit card, smart card or credit card into the DAT card interface 212.

The DAT card interface 212 retrieves the identification information from the card for subsequent transmission to the destination of the internet transaction. Further, the DAT scanner 202 could capture a hand written signature from a document or the DAT signature pad 214 could capture an electronic signature written on it with a special pen. Similarly, these security features allow a credit card recipient to activate the card with a DAT 200 located at a merchant site. The security features would detect unauthorized use of debit cards, credit cards and smart cards resulting from their unlawful interception. Accordingly, the DataTreasury™ System's 100 security features offer a more

secure alternative for internet and telephone transactions than the typical methods which only require transmission of a card account number and expiration date.

As is known to persons of ordinary skill in the art, the
5 DATs 200 could also include additional devices for capturing other biometric data for additional security. These devices include facial scans, fingerprints, voice prints, iris scans, retina scans and hand geometry.

In addition to initiating sale and banking transactions,
10 the DAT card interface 212 also reads sale and banking transactions initiated elsewhere from the memory of smart cards to enable subsequent storage and processing by the DataTreasury™ System. If a smart card is lost, stolen, damaged or deliberately altered by an unscrupulous holder
15 after the DAT card interface 212 reads its transaction data, the DataTreasury™ System 100 can reproduce the transaction data for the customer. Accordingly, the DAT card interface 212 provides support for independent verification of the records maintained by consumers, merchants and bankers to
20 prevent the loss of data from the loss, theft, damage or deliberate alteration of the smart card.

The DAT card interface 212 also supports the initiation and retrieval of sale and banking transactions with the DataTreasury™ System anonymous smart cards. In contrast to
25 standard debit cards and credit cards, the DataTreasury™ System anonymous smart card does not identify the card's holder by name. Instead, the DataTreasury™ System anonymous smart card requires only an account number and a password. Since DataTreasury™ System anonymous smart card transactions
30 can be identified without the customer's name, a DataTreasury™ System 100 customer can purchase a DataTreasury™ System anonymous smart card, add money to the card, make expenditures with the card and monitor the card's account with the same degree of privacy as cash acquisition,
35 expenditure and management.

The DAT scanner 202, the internet access, the signature pad 214 and other biometric data capture devices also support

the remote capture of survey information and purchase orders. For example, the DAT scanner 202 captures surveys appearing on the back of checks at restaurants and bars. Similarly, the DAT scanner 202 could capture purchase orders from
5 residences, enabling customers to make immediate purchases from their home of goods promoted through the mail. Accordingly, home marketing merchant could transmit sales in a more cost efficient and reliable manner by using the DAT scanner 202 instead of providing envelopes with prepaid
10 postage to residences.

The DAT scanner 202 also captures receipts which are subsequently needed for tax return preparation or tax audits. Similarly, the DAT scanner 202 captures sales receipts from merchants, providing an off-site secure, reliable repository
15 to guard against loss resulting from flooding, fire or other circumstances. This feature could also allow a merchant to automatically perform inventory in a reliable and cost-effective manner.

The DAT controller 210 performs processing tasks and
20 Input/Output (I/O) tasks which are typically performed by a processor. The DAT controller 210 compresses, encrypts and tags the BI to form a Tagged Encrypted Compressed Bitmap Image (TECBI). The DAT controller 210 also manages the Input/Output (I/O). Specifically, the DAT controller 210
25 manages devices like the DAT scanner 202, the DAT digital storage 206, the optional DAT printer 208 and the DAT modem 204.

The DAT digital storage 208 holds data such as the TECBI. The DAT modem 204 transmits data from the DAT 200 to
30 the appropriate DAC 400 as instructed by the DAT controller 210. Specifically, the DAT modem 204 transmits the TECBIs from the DAT digital storage 208 to the appropriate DAC 400. In the preferred embodiment, the DAT modem 204 is a high speed modem with dial-up connectivity. The DAT digital
35 storage 208 is sufficiently large to store the input data before transmission to a DAC 400. The DAT digital storage 208 can be Random Access Memory (RAM) or a hard drive.

FIG. 3a is a flow chart 300 describing the operation of the DAT in detail. In step 310, the DAT scanner 202 scans paper receipts into the DAT 200 provided by an operator. In step 312, the DAT controller 210 determines whether the operation executed successfully. If the scanning is successful, the DAT scanner 202 produces a Bitmap Image (BI). If the scanning is unsuccessful, the DAT controller 210 notifies the operator of the trouble and prompts the operator for repair in step 370.

10 If a BI is created, the DAT controller 210 executes a conventional image compression algorithm like the Tagged Image File Format (TIFF) program to compress the BI in step 314. In step 316, the DAT controller 210 determines whether the compression executed successfully. If the compression is successful, it produces a Compressed Bitmap Image (CBI). If the compression is unsuccessful, the DAT controller 210 notifies the operator of the trouble and prompts the operator for repair in step 370.

20 If a CBI is created, the DAT controller 210 executes an encryption algorithm which is well known to an artisan of ordinary skill in the field to encrypt the CBI in step 318. Encryption protects against unauthorized access during the subsequent transmission of the data which will be discussed below. In step 320, the DAT controller 210 determines whether the encryption operation executed successfully. If the encryption is successful, it produces an Encrypted Compressed Bitmap Image (ECBI). If the encryption is unsuccessful, the DAT controller 210 notifies the operator of the trouble and prompts the operator for repair in step 370.

30 If an ECBI is created, the DAT controller 210 tags the ECBI with a time stamp which includes the scanning time, an identification number to identify the merchant originating the scan and any additional useful information in step 322. In step 324, the DAT controller 210 determines whether the tagging operation executed successfully. If the tagging is successful, it produces a Tagged Encrypted Compressed Bitmap Image (TECBI). If the tagging is unsuccessful, the DAT

controller 210 notifies the operator of the trouble and prompts the operator for repair in step 370.

If a TECBI is created, the DAT controller 210 stores the TECBI in the DAT digital storage 208 in step 326. In step 5 328, the DAT controller 210 determines whether the storing operation executed successfully. If the storing operation is successful, the DAT digital storage 208 will contain the TECBI. If the storing operation is unsuccessful, the DAT controller 210 notifies the operator of the trouble and 10 prompts the operator for repair in step 370.

If the TECBI is properly stored in the DAT digital storage 208, the DAT controller 210 determines whether all paper receipts have been scanned in step 330. If all paper receipts have not been scanned, control returns to step 310 15 where the next paper receipt will be processed as discussed above. If all paper receipts have been scanned, the DAT controller 210 asks the operator to verify the number of scanned receipts in step 334. If the number of scanned receipts as determined by the DAT controller 210 does not 20 equal the number of scanned receipts as determined by the operator, the DAT controller 210 asks whether the operator desires to rescan all of the receipts in step 338.

If the operator chooses to rescan all of the receipts in step 338, the DAT controller 210 will delete all of the 25 TECBIs associated with the batch from the DAT digital storage 208 in step 342. After the operator prepares the batch of receipts for rescan in step 346, control returns to step 310 where the first receipt in the batch will be processed as discussed above.

30 If the operator chooses not to rescan all of the receipts from the batch in step 338, control returns to step 334 where the DAT controller 210 asks the operator to verify the number of scanned receipts as discussed above.

If the number of scanned receipts as determined by the 35 DAT controller 210 equals the number of scanned receipts as determined by the operator, the DAT controller 210 prints a batch ticket on the DAT printer 206 in step 350. The

operator will attach this batch ticket to the batch of receipts which have been scanned. This batch ticket shall contain relevant session information such as scan time, number of receipts and an identification number for the data 5 operator. If processing difficulties occur for a batch of receipts after the image capture of flowchart 300, the batch ticket will enable them to be quickly located for rescanning with the DAT 200.

In step 354, the DAT controller 210 determines whether 10 the scan session has completed. If the scan session has not completed, control returns to step 310 where the first receipt in the next batch of the scan session will be processed as discussed above. If the scan session has completed, the DAT controller 210 selectively prints a 15 session report on the DAT printer 206 in step 358. The DAT controller 210 writes statistical information for the session to the DAT digital storage 208 in step 362. In step 366, the DAT controller 210 terminates the session.

FIG. 3b displays a sample paper receipt which is 20 processed by the DAT 200 as described by the flowchart in FIG. 3a. The sample paper receipt involves a credit card transaction which has four participants:

A. The ISSUER: is an entity such as a bank or corporate financial institution such as GE Capital, GM or AT&T which 25 provides the credit behind the credit card and issues the card to the consumer.

B. The PROCESSOR: executes the processing of an inbound credit card transaction by performing basic transaction validation that includes checking with the ISSUER 30 database to ensure that the credit card has sufficient credit to allow approval of the transaction.

C. The ACQUIRER: specializes in the marketing, installation and support of Point Of Sale (POS) credit card terminals. The acquirer, like the DAC 400 in the 35 DataTreasury™ System 100 acts as an electronic collection point for the initial credit card transaction as the card is

inserted into the POS terminal. After acquisition, the acquirer passes the transaction to the PROCESSOR.

D. The MERCHANT: inserts a credit card into a POS terminal and enters the amount of the transaction to initiate
5 the credit card transaction.

In the preferred embodiment, the DAT 200 reads the following information from the sample paper receipt shown in FIG. 3b and stores the information in the format described below.

10 CUSTOMER_ID 370 : This field is a 7 position HEX numeric value. This field uniquely identifies the customer using the terminal. In this sample, this field would identify the credit card merchant.

TERMINAL_ID 372: This field is a 6 position decimal
15 numeric value. This field uniquely identifies the credit card terminal which is used to print the credit card receipt.

TRANSACTION_DATE 374: This field contains the date and time of the credit card transaction.

TRANSACTION_LINE_ITEM 376: This field is a variable
20 length character string. The first three positions represent a right justified numeric field with leading zeros indicating the full length of this field. This field contains all data pertaining to the purchased item including the item's price. The DAT 200 will store a TRANSACTION_LINE_ITEM field for each
25 transaction line item on the receipt. This field is optional since not all credit card transactions will have line items.

TRANSACTION_SUBTOTAL 378: This field is a double precision floating point number. This field indicates the subtotal of the TRANSACTION_LINE_ITEMS.

30 TRANSACTION_SALES_TAX 380: This field is a double precision floating point number. This field contains the sales tax of the TRANSACTION_SUBTOTAL.

TRANSACTION_AMOUNT 382: This field is a double precision floating point number. This field is the sum of
35 the TRANSACTION_SUBTOTAL and TRANSACTION_SALES_TAX.

CREDIT_CARD_ACCT_NUM 384: This field is a 12 position decimal value. This field identifies the credit card which was used to execute this transaction.

CREDIT_CARD_EXP_DATE 386: This field identifies the
5 expiration date of the credit card.

TRANSACTION_APPROVAL_CODE 388: This field is a 6 position numeric value. This field indicates the approval code that was given for the particular transaction.

The DAT 200 also stores additional items which are not
10 pictured in FIG. 3b as described below:

ISSUER_ID: This field is a 7 position decimal numeric value. This field identifies the credit card issuer.

ACQUIRER_ID: This field is a 7 position decimal numeric value. This field identifies the acquirer.

15 *PROCESSOR_ID*: This field is a 7 position decimal numeric value. This field identifies the processor.

TRANSACTION_LINE_ITEM_CNT: This field is a 3 position decimal numeric value. This field identifies the number of transaction line items on the receipt. A value of ZERO
20 indicates the absence of any transaction line items on the receipt.

TRANSACTION GRATUITY: This field is a double precision floating number. This field is optional because it will only appear on restaurant or bar receipts.

25 *FINAL_TRANSACTION_AMOUNT*: This field is a double precision floating number. This field is optional because it will only appear on restaurant and bar receipts. The field is the sum of the *TRANSACTION_AMOUNT* and *TRANSACTION GRATUITY*.

30 The tag prepended to the ECBI in step 322 of the flowchart of FIG. 3a identifies the time and place of the document's origination. Specifically, the tag consists of the following fields:

DAT_TERMINAL_ID: This field is a 7 position hexadecimal
35 numeric value. This field uniquely identifies the DAT 200 which is used by the customer.

DAT_SESSION_DATE: This field identifies the date and time of the DAT 200 session which generated the image of the document.

DAT_USER_ID: This field is a 4 position decimal numeric value. This field identifies the individual within the CUSTOMER's organization who initiated the DAT 200 session.

DATA_GLYPH_RESULT: This field is a variable length character string. The first four positions hold a right justified numeric position with leading zero which indicate the length of the field. The fifth position indicates the DataGlyph™ element status. A value of 0 indicates that the data glyph was NOT PRESENT on the receipt. A value of 1 indicates that the data glyph WAS PRESENT and contained no errors. A value of 2 indicates that the data glyph WAS PRESENT and had nominal errors. If the fifth position of this field has a value of 2, the remaining portion of the string identifies the erroneous field numbers. As subsequently described, the DPC 600 will reference this portion of the field to capture the erroneous data from the receipt with alternate methods. A value of 3 indicates that the data glyph WAS PRESENT WITH SEVERE ERRORS. In other words, a value of 3 indicates the DataGlyph™ element was badly damaged and unreadable.

The receipt shown in FIG. 3b can also contain a signature which can be captured by the DAT scanner 202. A data glyph could identify the location of the signature on the receipt.

As is known to persons of ordinary skill in the art, the DataTreasury™ System 100 can also process receipts with alternate formats as long as the receipt contains the appropriate identification information such as the transaction amount, the customer, the DAT 200, the transaction date, the transaction tax, the credit card number, the credit card expiration date, etc.

The DataTreasury™ System 100 partitions the paper receipt into image snippets as illustrated by the sample on FIG. 3b. Partitioning facilitates an improvement in the

process to correct errors from the scanning operation. If an error occurred during scanning, the DataTreasury™ System 100 corrects the error using manual entry. With partitioning, the DataTreasury™ System 100 focuses the correction effort on only the image snippet having the error instead of correcting the entire document. The subsequently discussed schema of the DataTreasury™ System 100 database describes the implementation of the partitioning concept in detail.

The DACs 400 form the backbone of the tiered architecture shown in FIG. 1 and FIG. 4. As shown in FIG. 1, each DAC 400 supports a region containing a group of DATs 200. Each DAC 400 polls the DATs 200 in its region and receives TECBIs which have accumulated in the DATs 200. The DACs 400 are located at key central sites of maximum merchant density.

In the preferred embodiment, the DAC server 402 comprises stand-alone Digital Equipment Corporation (DEC) SMP Alpha 4100 2/566 servers which are connected on a common network running Windows NT. The DEC Alpha servers manage the collection and intermediate storage of images and data which are received from the DATs 200.

As is known to persons of ordinary skill in the art, the DataTreasury™ System 100 could use any one of a number of different servers that are available from other computer vendors as long as the server meets the capacity, performance and reliability requirements of the system.

In the preferred embodiment, the DAC server 402 also comprises EMC 3300 SYMMETRIX CUBE Disk Storage Systems, which store the images and data collected and managed by the DEC Alpha servers. The DAC 400 architecture also uses a SYMMETRIX Remote Data Facility (SRDF), available from EMC, to enable multiple, physically separate data centers housing EMC Storage Systems to maintain redundant backups of each other across a Wide Area Network (WAN). Since SRDF performs the backup operations in the background, it does not affect the operational performance of the DataTreasury™ System 100. The DAC server 402 also has secondary memory 410. In the

preferred embodiment, the secondary memory 410 is a small scale DLT jukebox.

The DAC Alpha servers of the DAC server 402 insert images and data received from the DATs 200 into a database which is stored on the disk storage systems using a data manipulation language as is well known to persons of ordinary skill in the art. In the preferred embodiment, the database is a relational database available from Oracle.

As is well known to persons of ordinary skill in the art, the DataTreasury™ System 100 could use any one of a number of different database models which are available from other vendors including the entity relationship model as long as the selected database meets the storage and access efficiency requirements of the system. See, e.g., Chapter 2 of Database System Concepts by Korth and Silberschatz.

The DAC 400 architecture uses a WEB based paradigm using an enhanced Domain Name Services (DNS), the Microsoft Component Object Model (DCOM), and Windows NT Application Program Interfaces (APIs) to facilitate communication and load balancing among the servers comprising the DAC server 402. As is known to persons of ordinary skill in the art, DNS, which is also known as Bind, statically translates name requests to Internet Protocol 4 (IP4) addresses. In the DAC 400 architecture, an enhanced DNS dynamically assigns IP4 addresses to balance the load among the servers comprising the DAC server 402.

In the preferred embodiment, the enhanced DNS is designed and implemented using objects from Microsoft DCOM. Using the DCOM objects, the enhanced DNS acquires real-time server load performance statistics on each server comprising the DAC server 402 from the Windows NT API at set intervals. Based on these load performance statistics, the enhanced DNS adjusts the mapping of name requests to IP4 addresses to direct data toward the servers which are more lightly loaded.

A large bank of modems 404 polls the DATs 200 at the customer sites within the DAC's 400 region. In the preferred embodiment, the bank of modems 404, available as CISCO

AS5200, is an aggregate 48 modem device with Local Area Network (LAN) 406 connectivity which permits the DAC servers 402 to dial the DATs 200 without requiring 48 separate modems and serial connections.

5 The DAC servers 402 and the bank of modems 404 are connected on a LAN 406. In the preferred embodiment, the LAN uses a switched 100BaseT/10BaseT communication hardware layer protocol. As is known to persons of ordinary skill in the art, the 100BaseT/10BaseT protocol is based on the Ethernet
10 model. Further, the numbers 100 and 10 refer to the communication link speed in megabits per second. In the preferred embodiment, the CISCO Catalyst 2900 Network Switch supports the LAN 406 connectivity between the devices connected to the LAN 406 including the DAC servers 402 and
15 the bank of modems 404.

As is known to persons of ordinary skill in the art, alternate LAN architectures could be used to facilitate communication among the devices of the LAN 406. For example, the LAN 406 could use a hub architecture with a round robin
20 allocation algorithm, a time division multiplexing algorithm or a statistical multiplexing algorithm.

A Wide Area Network (WAN) router 408 connects the LAN 406 to the WAN to facilitate communication between the DACs 400 and the DPCs 600. In the preferred embodiment, the WAN
25 router 408 is a CISCO 4700 WAN Router. The WAN router 408 uses frame relay connectivity to connect the DAC LAN 406 to the WAN. As is known to persons of ordinary skill in the art, alternate devices, such as the NORTEL Magellen Passport "50" Telecommunication Switch, could be used to facilitate
30 communication between the DACs 400 and the DPCs 600 as long as the selected router meets the performance and quality communication requirements of the system.

As is known to persons of ordinary skill in the art, frame relay is an interface protocol for statistically
35 multiplexed packet-switched data communications in which variable-sized packets (frames) are used that completely enclose the user packets which they transport. In contrast

to dedicated point to point links that guarantee a specific data rate, frame relay communication provides bandwidth on-demand with a guaranteed minimum data rate. Frame relay communication also allows occasional short high data rate
5 bursts according to network availability.

Each frame encloses one user packet and adds addressing and verification information. Frame relay data communication typically has transmission rates between 56 kilobytes per second (kb/s) and 1.544 megabytes per second (Mb/s). Frames
10 may vary in length up to a design limit of approximately 1 kilobyte.

The Telco Carrier Cloud 412 is a communication network which receives the frames destined for the DPC 600 sent by the WAN router 408 from the DACs 400. As is known to persons
15 of ordinary skill in the art, carriers provide communication services at local central offices. These central offices contain networking facilities and equipment to interconnect telephone and data communications to other central offices within its own network and within networks of other carriers.

20 Since carriers share the component links of the interconnection network, data communication must be dynamically assigned to links in the network according to availability. Because of the dynamic nature of the data routing, the interconnection network is referred to as a
25 carrier cloud of communication bandwidth.

All the DAC 400 equipment is on fully redundant on-line UPS power supplies to insure maximum power availability. Further, to minimize the time for trouble detection, trouble analysis and repair, all the DAC 400 equipment incorporates
30 trouble detection and remote reporting/diagnostics as is known to an artisan of ordinary skill in the art.

FIG. 5 is a flow chart 500 describing the polling of the DATs 200 by a DAC 400 and the transmission of the TECBIs from the DATs 200 to the DAC 400. In step 502, the DAC server 402
35 reads the address of the first DAT 200 in its region for polling. In step 504, a modem in the modem bank 404 dials the first DAT 200. The DAC 400 determines whether the call

to the DAT 200 was successful in step 506. If the call to the first DAT 200 was unsuccessful, the DAC 400 will record the error condition in the session summary report and will report the error to the DPC 600 in step 522.

5 If the call to the first DAT 200 was successful, the DAC 400 will verify that the DAT 200 is ready to transmit in step 508. If the DAT 200 is not ready to transmit, the DAC 400 will record the error condition in the session summary report and will report the error to the DPC 600 in step 522.

10 If the DAT 200 is ready to transmit in step 508, the DAT 200 will transmit a TECBI packet header to the DAC 400 in step 510. The DAC 400 will determine whether the transmission of the TECBI packet header was successful in step 512. If the transmission of the TECBI packet header was
15 unsuccessful, the DAC 400 will record the error condition in the session summary report and will report the error to the DPC 600 in step 522.

If the transmission of the TECBI packet header was successful in step 512, the DAT 200 will transmit a TECBI
20 packet to the DAC 400 in step 514. The DAC 400 will determine whether the transmission of the TECBI packet was successful in step 516. If the transmission of the TECBI packet header was unsuccessful, the DAC 400 will record the error condition in the session summary report and will report
25 the error to the DPC 600 in step 522.

If the transmission of the TECBI packet was successful in step 516, the DAC 400, in step 518, will compare the TECBI packet header transmitted in step 510 to the TECBI packet transmitted in step 514. If the TECBI packet header does not
30 match the TECBI packet, the DAC 400 will record the error condition in the session summary report and will report the error to the DPC 600 in step 522.

If the TECBI packet header matched the TECBI packet in step 518, the DAC 400 will set the status of the TECBI packet
35 to indicate that it is ready for transmission to the DPC 600 in step 520. The DAC 400 will also transmit the status to the DAT 200 to indicate successful completion of the polling

and transmission session in step 520. Next, the DAC 400 will determine whether TECBIs have been transmitted from all of the DATs 200 in its region in step 524. If all DATs 200 in the DAC's 400 region have transmitted TECBIs to the DAC 400, 5 the DAC 400 will compile a DAT 200 status report in step 528 before terminating the session.

If one or more DATs 200 in the DAC's 400 region have not transmitted TECBIs to the DAC 400, the DAC 400 will get the address of the next DAT 200 in the region in step 526. Next, 10 control returns to step 504 where the next DAT 200 in the DAC's 400 region will be polled as previously discussed.

In the preferred embodiment, the DAC server 402 initiates the polling and data transmission at optimum toll rate times to decrease the cost of data transmission. In 15 addition to the raid drives and redundant servers, the DAC 400 will also have dual tape backup units which will periodically backup the entire data set. If there is a catastrophic failure of the DAC 400, the tapes can be retrieved and sent directly to the DPC 600 for processing. 20 As the DAT 200 polling and data transmission progresses, the DAC 400 will periodically update the DPC 600 with its status. If there is a catastrophic failure with the DAC 400, the DPC 600 would know how much polling and backup has been done by the failing DAC 400. Accordingly, the DPC 600 can easily 25 assign another DAC 400 to complete the polling and data transmission for the DATs 200 in the failed DAC's 400 region.

FIG. 6 is a block diagram of the DPC 600 architecture. The DPC 600 accumulates, processes and stores images for later retrieval by DataTreasury™ System retrieval customers 30 who have authorization to access relevant information. DataTreasury™ System retrieval customers include credit card merchants, credit card companies, credit information companies and consumers. As shown in FIG. 6 and FIG. 1, the DPC 600 polls the DACs 400 and receives TECBIs which have 35 accumulated in the DACs 400.

In the preferred embodiment, the DPC server 602 comprises stand-alone Digital Equipment Corporation (DEC) SMP

Alpha 4100 4/566 servers which are connected on a common network running Windows NT. The DEC Alpha servers manage the collection and intermediate storage of images and data which are received from the DACs 400.

5 In the preferred embodiment, the DPC server 602 also comprises EMC 3700 SYMMETRIX CUBE Disk Storage Systems, which store the images and data collected and managed by the DEC Alpha servers. Like the DAC 400 architecture, the DPC 600 architecture uses a SYMMETRIX Remote Data Facility (SRDF),
10 available from EMC, to enable multiple, physically separate data centers housing EMC Storage Systems to maintain redundant backups of each other across a Wide Area Network (WAN).

Like the DAC 400 architecture, the DPC 600 architecture
15 uses a WEB based paradigm using an enhanced Domain Name Services (DNS), the Microsoft Component Object Model (DCOM), and Windows NT Application Program Interfaces (APIs) to facilitate communication and load balancing among the servers comprising the DPC server 602 as described above in the
20 discussion of the DAC 400 architecture.

The workstation 604 performs operation control and system monitoring and management of the DPC 600 network. In the preferred embodiment, the workstation 604, available from Compaq, is an Intel platform workstation running Microsoft
25 Windows NT 4.x. The workstation 604 should be able to run Microsoft Windows NT 5.x when it becomes available. The workstation 604 executes CA Unicenter TNG software to perform network system monitoring and management. The workstation 604 executes SnoBound Imaging software to display and process
30 TECBIs.

The workstation 604 also performs identification verification by comparing signature data retrieved remotely by the DATs 200 with signature data stored at the DPC 600. In the preferred embodiment, signature verification software,
35 available from Communications Intelligence Corporation of Redwood Shores, California executing on the workstation 604 performs the identification verification. As is known to

persons of ordinary skill in the art, the workstation 604 could execute other software to perform identification verification by comparing biometric data including facial scans, fingerprints, retina scans, iris scans and hand geometry. Thus, the DPC 600 could verify the identity of a person who is making a purchase with a credit card by comparing the biometric data captured remotely with the biometric data stored at the DPC 600.

As is known to persons of ordinary skill in the art, the DataTreasury™ System 100 could use workstations with central processing units from other integrated circuit vendors as long as the chosen workstation has the ability to perform standard operations such as fetching instructions, fetching data, executing the fetched instructions with the fetched data and storing results. Similarly, the DataTreasury™ System 100 could use alternate windows operating systems and network monitoring software as long as the selected software can monitor the status of the workstations and links in the network and display the determined status to the operator.

The Remote Data Entry Gateway 614 and the Remote Offsite Data Entry Facilities 616 correct errors which occurred during data capture by the DAT 200. Since the DataTreasury™ System 100 partitions the document as described in the discussion of the sample receipt of FIG. 3b, the operator at the Remote Data Entry Gateway 614 or the Remote Offsite Data Entry Facilities 616 only needs to correct the portion of the document or image snippet which contained the error.

Partitioning improves system performance, decreases system cost and improves system quality. With partitioning, the DPC Server 602 only sends the portion of the document containing the error to the Remote Data Entry Gateway 614 or the Remote Offsite Data Entry Facilities 616. Since the operator at these data entry locations only sees the portion of the document which contained the error, she can quickly recognize and correct the error. Without partitioning, the operator would have to search for the error in the entire document. With this inefficient process, the operator would

need more time and would be more likely to make a mistake by missing the error or making a modification in the wrong location. Accordingly, partitioning improves system performance and quality by increasing the speed and accuracy of the error correction process.

Similarly, partitioning decreases the traffic on the DPC LAN 606 and the Telco Carrier Cloud 412 because the DPC Server 602 only sends the image snippet containing the error to the Remote Offsite Data Entry Facility 616 or the Remote Data Entry Gateway 614. Accordingly, partitioning decreases system cost by reducing the bandwidth requirement on the interconnection networks.

A DPC LAN 606 facilitates communication among the devices which are connected to the LAN 606 including the DPC server 602 and the network workstation 604. In the preferred embodiment, the DPC LAN 606 uses a switched 100BaseT/10BaseT communication hardware layer protocol like the DAC LAN 406 discussed earlier. In the preferred embodiment, the DPC LAN 406 is a high speed OC2 network topology backbone supporting TCP/IP. The CISCO Catalyst 5500 Network Switch supports the DPC LAN 606 connectivity among the devices connected to the LAN 606.

As is known to persons of ordinary skill in the art, alternate LAN architectures could be used to facilitate communication among the devices of the LAN 406. For example, the LAN 406 could use a hub architecture with a round robin allocation algorithm, a time division multiplexing algorithm or a statistical multiplexing algorithm.

A Wide Area Network (WAN) router 612 connects the DPC LAN 606 to the WAN to facilitate communication between the DACs 400 and the DPCs 600. In the preferred embodiment, the WAN router 612 is a CISCO 7507 WAN Router. The WAN router 612 uses frame relay connectivity to connect the DPC LAN 612 to the WAN. As is known to persons of ordinary skill in the art, alternate devices, such as the NORTEL Magellen Passport "50" Telecommunication Switch, could be used to facilitate communication between the DACs 400 and the DPCs 600 as long

as the selected router meets the performance and quality communication requirements of the system

The DPC 600 has a three tier storage architecture to support the massive storage requirement on the DataTreasury™

5 System 100. In the preferred embodiment, the storage architecture consists of Fiber Channel RAID technology based EMC Symmetrix Enterprise Storage Systems where individual cabinets support over 1 Terabyte of storage. After TECBI images have been processed and have been on-line for 30 days, 10 they will be moved to DVD based jukebox systems. After the TECBI images have been on-line for 90 days, they will be moved to Write Once Read Many (WORM) based jukebox systems 608 for longer term storage of up to 3 years in accordance with customer requirements.

15 In an alternate embodiment, the DPC 600 is intended to also configure a High Density Read Only Memory (HD-ROM) when it becomes available from NORSAM Technologies, Los Alamos, New Mexico, into optical storage jukebox systems 610, such as that which is available from Hewlett Packard, to replace the 20 DVD components for increased storage capacity. The HD-ROM conforms to CD-ROM form factor metallic WORM disc. The HD-ROM currently has a very large storage capacity of over 320 giga bytes (320 GB) on a single platter and has an anticipated capacity of several terabytes (TB) on a single 25 platter. The DPC 600 uses IBM and Philips technology to read from the HD-ROM and to write to the HD-ROM.

The DPC Alpha servers of the DPC server 602 insert images and data received from the DACs 400 into a single database which is stored on the Digital Storage Works Systems 30 using a data manipulation language as is well known to persons of ordinary skill in the art. In the preferred embodiment, the database is the V8.0 Oracle relational database which was designed to support both data and image storage within a single repository.

35 As known to persons of ordinary skill in the art, a relational database consists of a collection of tables which have a unique name. See, e.g., Chapter Three of Database

System Concepts by Korth and Silberschatz. A database schema is the logical design of the database. Each table in a relational database has attributes. A row in a table represents a relationship among a set of values for the 5 attributes in the table. Each table has one or more superkeys. A superkey is a set of one or more attributes which uniquely identify a row in the table. A candidate key is a superkey for which no proper subset is also a superkey. A primary key is a candidate key selected by the database 10 designer as the means to identify a row in a table.

As is well known to persons of ordinary skill in the art, the DataTreasury™ System 100 could use other database models available from other vendors including the entity relationship model as long as the selected database meets the 15 storage and access efficiency requirements of the system. See, e.g., Chapter 2 of Database System Concepts by Korth and Silberschatz.

An exemplary DPC 600 basic schema consists of the tables listed below. Since the names of the attributes are 20 descriptive, they adequately define the attributes' contents. The primary keys in each table are identified with two asterisks (**). Numeric attributes which are unique for a particular value of a primary key are denoted with the suffix, "NO". Numeric attributes which are unique within the 25 entire relational database are denoted with the suffix, "NUM".

I. CUSTOMER: This table describes the DataTreasury™ System customer.

- 30 A. **CUSTOMER_ID
 B. COMPANY_NAME
 C. CONTACT
 D. CONTACT_TITLE
 E. ADDR1
35 F. ADDR2
 G. CITY
 H. STATE_CODE

I. ZIP_CODE
 J. COUNTRY_CODE
 K. VOX_PHONE
 L. FAX_PHONE
 5 M. CREATE_DATE

II. CUSTOMER_MAIL_TO: This table describes the mailing address of the DataTreasury™ System customer.

10 A. **MAIL_TO_NO
 B. **CUST_ID
 C. CUSTOMER_NAME
 D. CONTACT
 E. CONTACT_TILE
 F. ADDR1
 15 G. ADDR2
 H. CITY
 I. STATE_CODE
 J. ZIP_CODE
 K. COUNTRY_CODE
 20 L. VOX_PHONE
 M. FAX_PHONE
 N. CREATE_DATE
 O. COMMENTS

25 III. CUSTOMER_DAT_SITE: This table describes the DAT location of the DataTreasury™ System customer.

A. **DAT_SITE_NO
 B. **CUST_ID
 C. CUSTOMER_NAME
 30 D. CONTACT
 E. CONTACT_TILE
 F. ADDR1
 G. ADDR2
 H. CITY
 35 I. STATE_CODE
 J. ZIP_CODE
 K. COUNTRY_CODE

- L. VOX_PHONE
- M. FAX_PHONE
- N. CREATE_DATE
- O. COMMENTS

5

IV. CUSTOMER_SITE_DAT: This table describes the DAT site(s) of the DataTreasury™ System customer.

- A. **DAT_TERMINAL_ID
- B. **DAT_SITE_NO
- C. **CUST_ID
- D. INSTALL_DATE
- E. LAST_SERVICE_DATE
- F. CREATE_DATE
- G. COMMENTS

10

15

V. DATA_SPEC: This table provides data specifications for document partitioning and extraction.

- A. **DATA_SPEC_ID
- B. **CUST_ID
- C. DESCR
- D. RECORD_LAYOUT_RULES
- E. CREATE_DATE
- F. COMMENTS

20

25

VI. DATA_SPEC_FIELD: This table provides field data specifications for document partitioning and extraction.

- A. **DATA_SPEC_NO
- B. **DATA_SPEC_ID
- C. FIELD_NAME
- D. DESCR
- E. DATA_TYPE
- F. VALUE_MAX
- G. VALUE_MIN
- H. START_POS
- I. END_POS
- J. FIELD_LENGTH
- K. RULES

30

35

- L. CREATE_DATE
- M. COMMENTS

VII. TEMPL_DOC: This table specifies the partitioning of a predefined document.

- 5 A. **TEMPL_DOC_NUM
- B. DATA_SPEC_ID
- C. DESCR
- D. RULES
- 10 E. CREATE_DATE
- F. COMMENTS

VIII. TEMPL_FORM: This table defines the location of forms on a predefined document.

- 15 A. **TEMPL_FORM_NO
- B. **TEMPL_DOC_NUM
- C. SIDES_PER_FORM
- D. MASTER_IMAGE_SIDE_A
- E. MASTER_IMAGE_SIDE_B
- 20 F. DISPLAY_ROTATION_A
- G. DISPLAY_ROTATION_B
- H. DESCR
- I. RULES
- J. CREATE_DATE

25

IX. TEMPL_PANEL: This table specifies the location of panels within the forms of a predefined document.

- A. **TEMPL_PANEL_NO
- B. **TEMPL_SIDE_NO
- 30 C. **TEMPL_FORM_NO
- D. **TEMPL_DOC_NUM
- E. DISPLAY_ROTATION
- F. PANEL_UL_X
- G. PANEL_UL_Y
- 35 H. PANEL_LR_X
- I. PANEL_LR_Y
- J. DESCR

K. RULES
L. CREATE_DATE

5 X. TEMPL_FIELD: This table defines the location of fields within the panels of a form of a predefined document.

A. **TEMPL_FIELD_NO
B. **TEMPL_PANEL_NO
C. **TEMPL_SIDE_NO
D. **TEMPL_FORM_NO
10 E. **TEMPL_DOC_NUM
F. DISPLAY_ROTATION
G. FLD_UL_X
H. FLD_UL_Y
I. FLD_LR_X
15 J. FLD_LR_Y
K. DESCR
L. RULES
M. CREATE_DATE

20 XI. DAT_BATCH: This table defines batches of documents which were processed during a DAT session.

A. **DAT_BATCH_NO
B. **DAT_SESSION_NO
C. **DAT_SESSION_DATE
25 D. **DAT_TERMINAL_ID
E. DAT_UNIT_CNT
F. CREATE_DATE

30 XII. DAT_UNIT: This table defines the unit in a batch of documents which were processed in a DAT session.

A. **DAT_UNIT_NUM
B. **DAT_BATCH_NO
C. **DAT_SESSION_NO
D. **DAT_SESSION_DATE
35 E. **DAT_TERMINAL_ID
F. FORM_CNT
G. DOC_CNT

H. CREATE_DATE

XIII. DAT_DOC: This table defines documents in the unit of documents which were processed in a DAT session.

- 5 A. **DAT_DOC_NO
- B. **DAT_UNIT_NUM
- C. DOC_RECORD_DATA
- D. CREATE_DATE

10 The DATA_SPEC, DATA_SPEC_FIELD, TEMPL_DOC, TEMPL_FORM, TEMPL_PANEL and TEMPL_FIELD tables implement the document partitioning algorithm mentioned above in the discussion of the sample receipt of FIG. 3b. The cross product of the DATA_SPEC and DATA_SPEC_FIELD tables partition arbitrary documents while the cross product of the TEMPL_DOC, TEMPL_FORM, TEMPL_PANEL and TEMPL_FIELD tables partition predefined documents of the DataTreasury™ System 100. The TEMPL-FORM defines the location of forms on a predefined document. The TEMPL-PANEL defines the location of panels within the forms of a predefined document. Finally, the TEMPL_FIELD table defines the location of fields within the panels of a form of a predefined document.

 The DPC 600 performs data mining and report generation for a wide variety of applications by returning information from the data base. For example, the DPC 600 generates market trend analysis reports and inventory reports for merchants by analyzing the data from receipts captured by the DAT 200. The DPC 600 also can provide important tax information to the taxpayer in the form of a report or to software applications like tax preparation software by retrieving tax information from the database which originally resided on receipts, documents and electronic transactions captured by the DAT 200. Similarly, the DPC 600 can also provide tax information for particular periods of time for a tax audit.

 FIG. 7 is a flow chart 700 describing the polling of the DACs 300 by a DPC 600 and the transmission of the TECBIs from

the DACs 300 to the DPC 600. In step 702, the DPC 600 reads the address of the first DAC 300 in its region for polling. In step 704, the DPC 600 connects with a DAC 300 for transmission. The DPC 600 determines whether the connection
5 to the DAC 300 was successful in step 706. If the call to the DAC 300 was unsuccessful, the DPC 600 will record the error condition in the session summary report and will report the error to the DPC 600 manager in step 722.

If the connection to the DAC 300 was successful, the DPC
10 600 will verify that the DAC 300 is ready to transmit in step 708. If the DAC 300 is not ready to transmit, the DPC 600 will record the error condition in the session summary report and will report the error to the DPC 600 manager in step 722.

If the DAC 300 is ready to transmit in step 708, the DAC
15 300 will transmit a TECBI packet header to the DPC 600 in step 710. The DPC 600 will determine whether the transmission of the TECBI packet header was successful in step 712. If the transmission of the TECBI packet header was unsuccessful, the DPC 600 will record the error condition in
20 the session summary report and will report the error to the DPC 600 manager in step 722.

If the transmission of the TECBI packet header was successful in step 712, the DAC 300 will transmit a TECBI packet to the DPC 600 in step 714. The DPC 600 will
25 determine whether the transmission of the TECBI packet was successful in step 716. If the transmission of the TECBI packet header was unsuccessful, the DPC 600 will record the error condition in the session summary report and will report the error to the DPC 600 manager in step 722.

If the transmission of the TECBI packet was successful
30 in step 716, the DPC 600, in step 718, will compare the TECBI packet header transmitted in step 710 to the TECBI packet transmitted in step 714. If the TECBI packet header does not match the TECBI packet, the DPC 600 will record the error
35 condition in the session summary report and will report the error to the DPC 600 manager in step 722.

If the TECBI packet header matched the TECBI packet in step 718, the DPC 600 will set the status of the TECBI packet to indicate that it was received at the DPC 600 in step 720. The DPC 600 will also transmit the status to the DAC 300 to indicate successful completion of the polling and transmission session in step 720. Next, the DPC 600 will determine whether TECBIs have been transmitted from all of the DACs 300 in its region in step 724. If all DACs 300 in the DPC's 600 region have transmitted TECBIs to the DPC 600, the DPC 600 will compile a DAC 300 status report in step 728 before terminating the session.

If one or more DACs 300 in the DPC's 600 region have not transmitted TECBIs to the DPC 600, the DPC 600 will get the address of the next DAC 300 in the region in step 726. Next, control returns to step 704 where the next DAC 300 in the DPC's 600 region will be polled as previously discussed.

FIG. 8 is a flow chart 800 describing the data processing performed by the DPC 600. In step 802, the DPC 600 fetches the first TECBI packet. Next, the DPC 600 extracts the first TECBI from the TECBI packet in step 804. In step 806, the DPC 600 inserts the TECBI into the database. In step 808, the DPC 600 extracts the tag header which includes the customer identifier, the encryption keys and the template identifier from the TECBI to obtain the ECBI. In step 810, the DPC 600 decrypts the ECBI image to obtain the CBI. In step 812, the DPC 600 uncompresses the CBI to obtain the BI. In step 814, the DPC 600 fetches and applies the BI template against the BI. Further the DPC 600 divides the BI into image snippets and tags the BI template with data capture rules in step 814 to form the Tagged Bitmap Image Snippets (TBIS). In step 816, the DPC 600 submits the TBISs for data capture operations to form the IS Derived Data Record (ISDATA). The DPC 600 discards the TBISs upon completion of the data capture operations in step 816. In step 818, the DPC 600 updates the TECBI record in the database with the IS Derived Data.

In step 820, the DPC 600 determines whether it has processed the last TECBI in the TECBI packet. If the last TECBI in the TECBI packet has not been processed, the DPC 600 extracts the next TECBI from the TECBI packet in step 822.

5 Next, control returns to step 806 where the next TECBI will be processed as described above.

If the last TECBI in the TECBI packet has been processed, the DPC 600 determines whether the last TECBI packet has been processed in step 824. If the last TECBI
10 packet has not been processed, the DPC 600 fetches the next TECBI packet in step 826. Next, control returns to step 804 where the next TECBI packet will be processed as described above. If the last TECBI packet has been processed in step 824, the DPC 600 terminates data processing.

15 As is known to persons of ordinary skill in the art, a user can request information from a relational database using a query language. See, e.g., Chapter Three of Database System Concepts by Korth and Silberschatz. For example, a user can retrieve all rows of a database table having a
20 primary key with particular values by specifying the desired primary key's values and the table name on a select operation. Similarly, a user can retrieve all rows from multiple database tables having primary keys with particular values by specifying the desired primary keys' values and the
25 tables with a select operation.

The DataTreasury™ System provides a simplified interface to its retrieval customers to enable data extraction from its relational database as described in FIG. 9. For example, a DataTreasury™ System customer can retrieve the time, date,
30 location and amount of a specified transaction.

The DPC 600 performs data mining and report generation for a wide variety of applications by returning information from the data base. For example, the DPC 600 generates market trend analysis reports and inventory reports for
35 merchants by analyzing the data from receipts captured by the DAT 200. The DPC 600 also can provide important tax information to the taxpayer in the form of a report or to tax

preparation software by retrieving tax information from the database which originally resided on receipts, documents and electronic transactions captured by the DAT 200. Similarly, the DPC 600 can also provide tax information for particular
5 periods of time for a tax audit.

FIG. 9 is a flowchart 900 describing the data retrieval performed by the DPC 600. In step 902, the DPC 600 receives a TECBI retrieval request. In step 904, the DPC 600 obtains the customer identifier. In step 906, the DPC 600 determines
10 whether the customer identifier is valid. If the customer identifier is not valid, control returns to step 904 where the DPC 600 will obtain another customer identifier.

If the customer identifier is valid in step 906, the DPC 600 will obtain the customer security profile in step 908.
15 In step 910, the DPC 600 receives a customer retrieval request. In step 912, the DPC 600 determines whether the customer retrieval request is consistent with the customer security profile. If the customer retrieval request is not consistent with the customer security profile, control
20 returns to step 910 where the DPC 600 will obtain another customer retrieval request. If the customer retrieval request is consistent with the customer security profile, the DPC 600 will transmit the results to the customer as indicated by the customer security profile in step 914.

25 FIG. 10 is a flow chart describing the use of the DataTreasury™ system to process checks. In step 1004, the DataTreasury™ system captures the check at the payer's remote location in the preferred embodiment before the payer presents the check to the payee. Alternatively, the payer
30 simply presents or mails the check to the payee. The capture of the check at the payer's remote location in step 1004 enables subsequent comparison of the check as written by the payer with the check as received by the payee. In other words, this step enables the detection of check alteration
35 from fraudulent check schemes where a check is intercepted before receipt by the payee and chemically washed to allow the perpetrator to work with a blank check.

In step 1006, the DataTreasury™ system captures the check and the payer's biometric data at the payee's remote location. In an alternate embodiment, the DataTreasury™ system sends electronic transaction data representing the
5 check from the payer's remote location to the payer's remote location. In step 1008, the DataTreasury™ system performs verification of the check and biometric data by comparing the remotely captured data with the data stored at a central location. The validation further includes checking the
10 courtesy amount and the payer's signature.

In step 1010, the DataTreasury™ system determines whether the verification was successful. If the verification of step 1010 was not successful, the system transmits an error message to the remote locations in step 1012 and
15 returns to step 1004 for resubmission. If the verification of step 1010 was successful, the system creates an electronic transaction representing the check at a central location in step 1014. The electronic transaction representing the check consists of the payer bank's identification number, routing
20 information, the payer's account number, a payer's check, a payer bank's draft, the amount of the check or draft, the payee bank's identification number, the payee bank's routing information, and the payee's account number. In step 1016, the electronic transaction representing the check is
25 transmitted to the payee bank. In step 1018, the payee bank transmits the electronic transaction representing the check to the payer bank.

In step 1020, the payer bank verifies the electronic transaction representing the check and determines whether to
30 approve a fund transfer. If the payee bank grants approval in step 1020, the payer bank transfers the funds from the payer bank to the payee bank in step 1022. In step 1024, the DataTreasury™ system notifies the payee bank and the remote locations as to the status of the transfer.

35 While the above invention has been described with reference to certain preferred embodiments, the scope of the present invention is not limited to these embodiments. One

skilled in the art may find variations of these preferred
embodiments which, nevertheless, fall within the spirit of
the present invention, whose scope is defined by the claims
set forth below.

5

10

15

20

25

30

35

THE CLAIMS

What is claimed is:

- 5 1. A system for central management, storage and report generation of remotely captured paper transactions from documents and receipts comprising:
- one or more remote data access subsystems for capturing and sending paper transaction data comprising at least one
- 10 data access controller for managing the capturing and sending of the transaction data;
- at least one central data processing subsystem for processing, sending, verifying and storing the paper transaction data comprising a data management subsystem for
- 15 managing the processing, sending and storing of the transaction data; and
- at least one communication network for the transmission of the transaction data within and between said one or more data access subsystems and said at least one data processing
- 20 subsystem.
2. A system as in claim 1 wherein said one or more data access subsystems further comprise at least one scanner for capturing the paper transaction data.
- 25 3. A system as in claim 2 wherein said one or more data access subsystems also capture electronic transactions from credit cards, smart cards and debit cards, signature data or biometric data, further comprising:
- 30 at least one card interface for capturing the electronic transaction data;
- at least one signature interface for capturing an electronic signature; and
- at least one biometric interface for capturing biometric
- 35 data.

4. A system as in claim 3 wherein said at least one data access controller successively transforms the captured transaction data to a bitmap image, a compressed bitmap image, an encrypted, compressed bitmap image and an
5 encrypted, compressed bitmap image tagged with information identifying a location and time of the transaction data capture.

5. A system as in claim 4 wherein said one or more data
10 access subsystems further comprise digital storage for storing the tagged, encrypted, compressed bitmap image.

6. A system as in claim 5 wherein said at least one card interface initiates the electronic transaction.

15 7. A system as in claim 6 wherein said one or more data access subsystems further comprise at least one printer for printing the paper transaction initiated by said at least one card interface.

20 8. A system as in claim 7 wherein the paper transaction printed by said at least one printer includes data glyphs.

9. A system as in claim 1 wherein said data management
25 subsystem of said at least one data processing subsystem comprises:

at least one server for polling said one or more remote data access subsystems for transaction data;
a database subsystem for storing the transaction data in
30 a useful form;
a report generator for generating reports from the transaction data and providing data to software applications;
at least one central processing unit for managing the storing of the transaction data;
35 a domain name services program for dynamically assigning one of said at least one server to receive portions of the

transaction data for balancing the transaction data among said at least one server; and
a memory hierarchy.

5 10. A system as in claim 9 wherein said at least one server also polls for biometric and signature data, said database stores the biometric data and the signature data, and said at least one central processing unit verifies the biometric data and the signature data.

10

11. A system as in claim 9 wherein said memory hierarchy comprises at least one primary memory for storage of recently accessed transaction data and at least one secondary memory for storage of other transaction data.

15

12. A system as in claim 11 wherein said at least one secondary memory comprises at least one write once read many jukebox and at least one optical storage jukebox.

20

13. A system as in claim 12 wherein said at least one optical storage jukebox comprises read only memory technology including compact disc read only memory form factor metallic write once read many disc.

25

14. A system as in claim 9 wherein said database subsystem comprises at least one predefined template for partitioning the stored transaction data into panels and identifying locations of the panels.

30

15. A system as in claim 14 wherein said data processing subsystem further comprises a data entry gateway for correcting errors in the panels of stored transaction data.

35

16. A system as in claim 1 wherein said at least one communication network comprises:

at least one first local area network for transmitting data within a corresponding one of said one or more remote data access subsystems;

at least one second local area network for transmitting
5 data within a corresponding one of said at least one data processing subsystem; and

at least one wide area network for transmitting data between said one or more remote data access subsystems and said at least one data processing subsystem.

10

17. A system as in claim 16 wherein said at least one communication network further comprises:

at least one modem for connecting said at least one first local area network of said one or more data access
15 subsystems to a corresponding one of said at least one second local area network of said at least one data processing subsystem through said at least one wide area network; and

at least one bank of modems for connecting said at least one second local area network of said at least one data
20 processing subsystem to a corresponding some of said at least one first local area network of said one or more data access subsystems through said at least one wide area network.

18. A system as in claim 1 further comprising at least
25 one data collecting subsystem for collecting and sending the electronic or paper transaction data comprising a further management subsystem for managing the collecting and sending of the transaction data.

30 19. A system as in claim 18 wherein said further data management subsystem of said at least one data collecting subsystem comprises:

at least one server for polling said one or more remote data access subsystems for transaction data;

35 a database for storing the transaction data in a useful form;

at least one central processing unit for managing the collecting of the transaction data;

a domain name services program for dynamically assigning one of said at least one server to receive portions of the
5 transaction data for balancing the transaction data among said at least one server; and
a memory hierarchy.

20. A system as in claim 19 wherein said memory
10 hierarchy comprises at least one primary memory for collecting transaction data and at least one secondary memory for backup storage of the transaction data.

21. A system as in claim 20 wherein said at least one
15 secondary memory comprises at least one DLT jukebox.

22. A system as in claim 18 wherein said at least one communication network comprises:

at least one first local area network for transmitting
20 data within a corresponding one of said one or more remote data access subsystems;

at least one second local area network for transmitting data within a corresponding one of said at least one data collection subsystem;

25 at least one third local area network for transmitting data within a corresponding one of said at least one data processing subsystem; and

at least one wide area network for transmitting data between said one or more remote data access subsystems, said
30 at least one data collection subsystem and said at least one data processing subsystem.

23. A system as in claim 22 wherein said at least one communication network further comprises:

35 at least one first modem for connecting said at least one first local area network of said one or more data access subsystems to a corresponding one of said at least one second

local area network through said at least one wide area network;

at least one bank of modems for connecting said at least one second local area network of said at least one data
5 collection subsystem to a corresponding some of said at least one first local area network of said one or more data access subsystems through said at least one wide area network;

at least one first wide area network router for connecting a corresponding one of said at least one second
10 local area network of said at least one data collecting subsystem to said at least one wide area network; and

at least one second wide area network router for connecting a corresponding one of said at least one third
15 local area network of said at least one data processing subsystem to said at least one wide area network.

24. A system as in claim 23 wherein said at least one first wide area network and said at least one second wide area network comprises a carrier cloud, said carrier cloud
20 using a frame relay method for transmitting the transaction data.

25. A system as in claim 22 wherein said at least one second local area network and said at least one third local
25 area network further comprises a corresponding one of at least one network switch for routing transaction data within said at least one second local area network and said at least one third local area network.

30 26. A method for central management, storage and verification of remotely captured paper transactions from documents and receipts comprising the steps of:

capturing and sending the paper transaction data at one or more remote locations;

35 managing the capturing and sending of the transaction data;

collecting, processing, sending and storing the transaction data at a central location;

managing the collecting, processing, sending and storing of the transaction data; and

5 transmitting the transaction data within and between the remote location(s) and the central location.

27. The method as in claim 26 wherein said managing the capturing and sending step comprises the steps of:

10 successively transforming the captured transaction data to a bitmap image, a compressed bitmap image, an encrypted, compressed bitmap image and an encrypted, compressed bitmap image tagged with information identifying a location and time of the transaction data capturing; and

15 storing the tagged, encrypted, compressed bitmap image.

28. The method as in claim 27 wherein said managing the capturing and sending step also captures electronic transactions from credit cards, smart cards and debit cards,

20 signature data or biometric data, further comprising the steps of:

initiating an electronic transaction;

capturing signature data;

capturing biometric data; and

25 printing a paper transaction with data glyphs for the initiated electronic transaction.

29. A method as in claim 26 wherein:

30 said capturing and sending step occurs at a plurality of remote locations; and

said collecting, processing, sending and storing step occurs at a plurality of central locations.

30. A method as in claim 29 wherein said collecting, processing, sending and storing step comprises the steps of:
polling the remote locations for transaction data with servers at the central locations;

storing the transaction data at the central location in a memory hierarchy, said storing maintains recently accessed transaction data in a primary memory and other transaction data in a secondary memory; and

- 5 dynamically assigning the servers at the central location to receive portions of the transaction data for balancing the transaction data among the servers; and generating reports from the transaction data and providing data to software applications.

10

31. A method as in claim 30 wherein said storing the transaction data step comprises the steps of:

partitioning the stored transaction data with predefined templates into panels; and

- 15 identifying locations of the panels.

32. A method as in claim 31 wherein said managing the collecting, processing, sending and storing of the transaction data step comprises correcting errors in the

- 20 panels of stored transaction data.

33. A method as in claim 32 further comprising the steps of:

- 25 polling the remote locations for captured electronic data, captured signature data and captured biometric data with servers at the central locations; and

comparing the captured signature data and the captured biometric data to stored signature data and stored biometric data respectively for identification verification.

30

34. A method as in claim 32 wherein said transmitting the transaction data step comprises the steps of:

- transmitting data within the remote locations;
transmitting data from each remote location to a
35 corresponding central location; and
transmitting data within the central locations.

35. A method as in claim 34 wherein said transmitting data from each remote location to a corresponding central location step comprises the steps of:

- connecting each remote location to a corresponding
- 5 central location; and
- connecting each central location to corresponding remote locations.

36. A method as in claim 29 further comprising the
10 steps of:

- collecting and sending the electronic or paper transaction data at intermediate locations;
- managing the collecting and sending of the transaction data; and
- 15 transmitting the transaction data within the intermediate location and between the intermediate locations and the remote locations and the central locations.

37. A method as in claim 36 wherein said managing the
20 collecting and sending step comprises the steps of:

- polling the remote locations for transaction data with servers in the intermediate locations;
- storing the transaction data in the intermediate locations in a useful form, said storing maintains the
- 25 transaction data in a primary memory of a memory hierarchy and performs backup storage of the transaction data into a secondary memory of the memory hierarchy; and
- dynamically assigning the servers to receive portions of the transaction data for balancing the transaction data among
- 30 the servers.

38. The method as in claim 36 wherein said transmitting the transaction data step comprises the steps of:

- transmitting data within the remote locations;
- 35 transmitting data from each remote location to a corresponding intermediate location;
- transmitting data within the intermediate locations;

transmitting data from each intermediate location to
corresponding central locations; and
transmitting data within the central locations.

5 39. A method as in claim 38 wherein said transmitting
data from each remote location to corresponding intermediate
locations step comprises the steps of:

connecting each remote location to a corresponding
intermediate location; and

10 connecting the intermediate locations to corresponding
remote locations.

40. A method as in claim 38 wherein said transmitting
data from each intermediate location to corresponding central
15 locations comprises the steps of:

connecting each intermediate location to an external
communication network; and

connecting the corresponding central locations to the
communication network.

20

41. A method as in claim 40 wherein said transmitting
data from each intermediate location to corresponding central
locations step further comprises the steps of:

packaging the transaction data into frames; and

25 transmitting the frames through the external
communication network.

42. A communication network for the transmission of
data within and between one or more remote subsystems, at
30 least one intermediate subsystem and at least one central
subsystem forming a tiered architecture wherein each of said
at least one central data processing subsystem communicate
with a corresponding some of said at least one data
collecting subsystem and each of said at least one data
35 collecting subsystem communicate with a corresponding some of
said one or more data processing subsystems comprising:

at least one first local area network for transmitting data within a corresponding one of said one or more remote subsystems;

at least one second local area network for transmitting
5 data within a corresponding one of said at least one intermediate subsystem;

at least one third local area network for transmitting data within a corresponding one of said at least one central subsystem; and

10 at least one wide area network for transmitting data between said one or more remote subsystems, said at least one intermediate subsystem and said at least one central subsystem.

15 43. A communication network as in claim 42 further comprising:

at least one first modem for connecting said at least one first local area network of said one or more remote subsystems to a corresponding one of said at least one second
20 local area network through said at least one wide area network;

at least one bank of modems for connecting said at least one second local area network of said at least one intermediate subsystem to a corresponding some of said at
25 least one first local area network of said one or more remote subsystems through said at least one wide area network;

at least one first wide area network router for connecting a corresponding one of said at least one second local area network of said at least one intermediate
30 subsystem to said at least one wide area network; and

at least one second wide area network router for connecting a corresponding one of said at least one third local area network of said at least one central subsystem to said at least one wide area network.

35

44. A system as in claim 43 wherein said at least one first wide area network and said at least one second wide

area network comprises a carrier cloud which utilizes a frame relay method for transmitting the transaction data.

45. A system as in claim 44 wherein said at least one
5 second local area network and said at least one third local
area network further comprises a corresponding one of at
least one network switch for routing transaction data within
said at least one second local area network and said at least
one third local area network; and further wherein said data
10 comprises (a) electronic transactions from credit cards,
smart cards and debit cards, signature data or biometric
data, or (b) paper transactions from documents and receipts.

46. A method for transmitting data within and between
15 one or more remote subsystems, at least one intermediate
subsystem and at least one central subsystem in a tiered
manner wherein each of the central subsystems communicate
with a corresponding some of the intermediate subsystems and
each of the intermediate subsystems communicate with a
20 corresponding some of the remote subsystems comprising the
steps of:

transmitting data within the remote locations;
transmitting data from each remote location to a
corresponding intermediate location;
25 transmitting data within the intermediate locations;
transmitting data from each intermediate location to
corresponding central locations; and
transmitting data within the central locations.

30 47. A method as in claim 46 wherein said transmitting
data from each remote location to corresponding intermediate
locations step comprises the steps of:
connecting each remote location to a corresponding
intermediate location; and
35 connecting the intermediate locations to corresponding
remote locations.

48. A method as in claim 47 wherein said transmitting data from each intermediate location to corresponding central locations comprises the steps of:

connecting each intermediate location to an external
5 communication network; and
connecting the corresponding central locations to the external communication network.

49. A method as in claim 48 wherein said transmitting
10 data from each intermediate location to corresponding central locations step further comprises the steps of:

packaging the transaction data into frames; and
transmitting the frames through the external
communication network.

15

50. A method as in claim 46 wherein said data is obtained from (a) electronic transactions from credit cards, smart cards and debit cards, signature data or biometric data, or (b) paper transactions from documents and receipts.

20

51. A method for central management, storage and verification of remotely captured paper transactions from documents and receipts as in claim 33 wherein said comparing step further comprises the step of comparing said captured
25 electronic data to stored electronic data.

52. A method for central management, storage and verification of remotely captured paper transactions from documents and receipts as in claim 51 wherein said
30 transaction data comprises a payer bank's identification number, a payer bank's routing number, a payer bank's routing information, a payer's account number, a payer's check, a payer bank's draft, a check amount, a payee bank's identification number, a payee bank's routing information,
35 and a payee's account number.

53. A method for central management, storage and verification of remotely captured paper transactions from documents and receipts as in claim 52 wherein said managing the collecting, processing, sending and storing step further
5 comprises the step of performing said paper transaction by transferring funds electronically from a payer bank to a payee bank.

10

15

20

25

30

35

REMOTE IMAGE CAPTURE
WITH CENTRALIZED PROCESSING AND STORAGE

ABSTRACT

5

A system for remote data acquisition and centralized processing and storage is disclosed called the DataTreasury™ System. The DataTreasury™ System provides comprehensive support for the processing of documents and electronic data associated with different applications including sale,
10 business, banking and general consumer transactions. The system retrieves transaction data such as credit card receipts checks in either electronic or paper form at one or more remote locations, encrypts the data, transmits the
15 encrypted data to a central location, transforms the data to a usable form, performs identification verification using signature data and biometric data, generates informative reports from the data and transmits the informative reports to the remote location(s). The DataTreasury™ System has many
20 advantageous features which work together to provide high performance, security, reliability, fault tolerance and low cost. First, the network architecture facilitates secure communication between the remote location(s) and the central processing facility. A dynamic address assignment algorithm
25 performs load balancing among the system's servers for faster performance and higher utilization. Finally, a partitioning scheme improves the error correction process.

CROSS-REFERENCE TO RELATED APPLICATIONS

30

This application is a continuation-in-part of application serial no. 08/917,761 filed August 27, 1997.

35

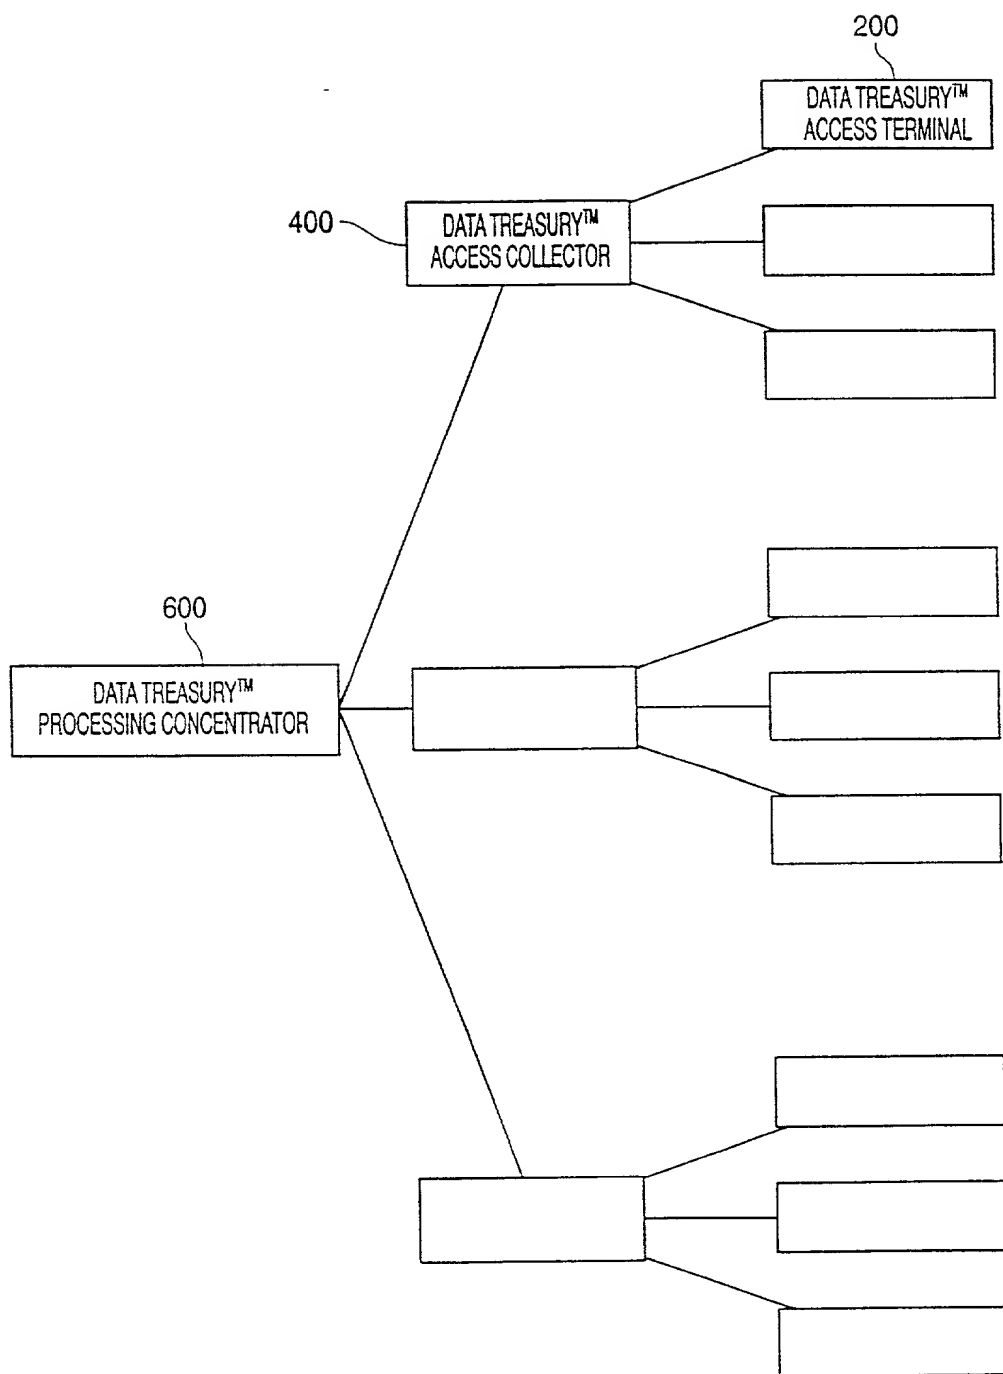


FIG. 1

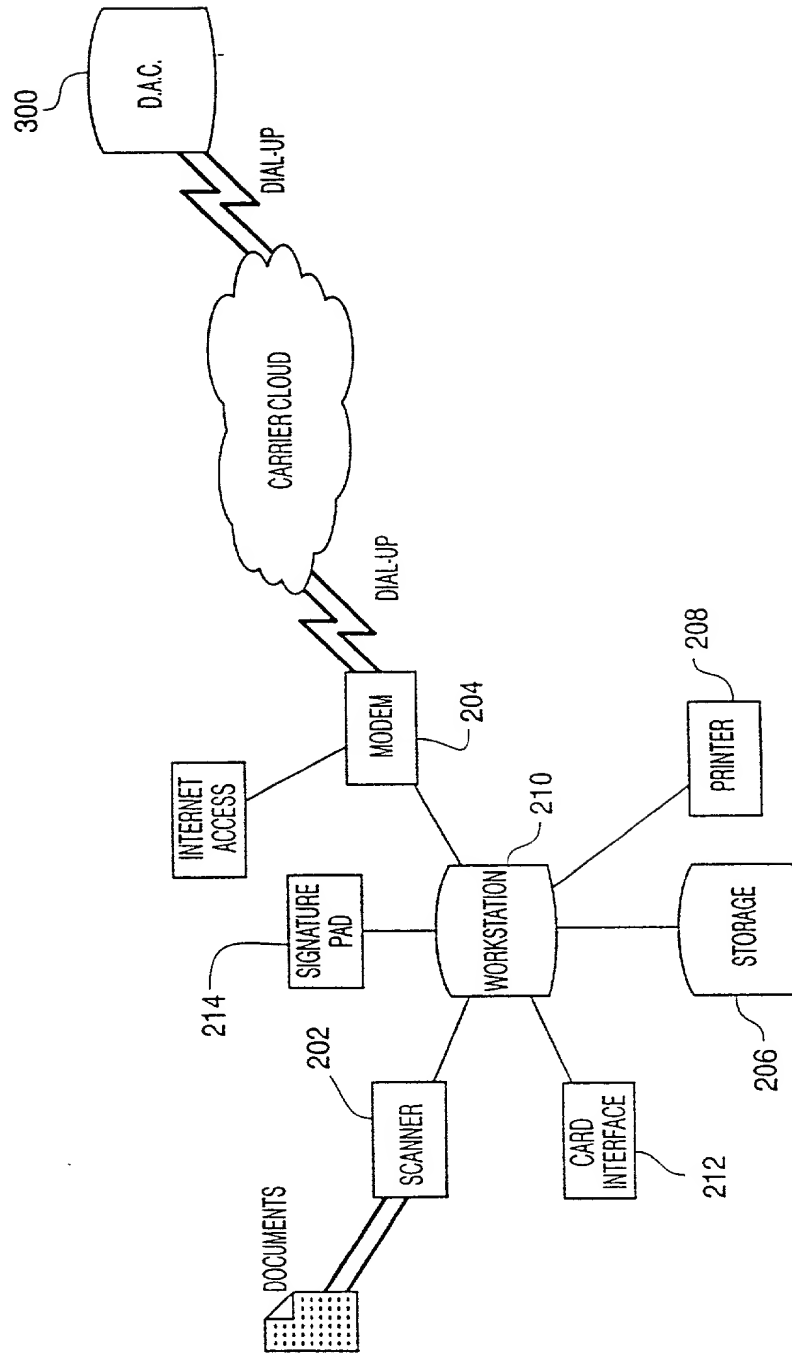


Fig. 2

The flowchart illustrates the credit slip processing system. It begins with a stack of **CREDIT SLIPS** being input to a funnel-shaped component **310**. From **310**, the flow proceeds to a decision point **312**. If the result is **N/G** (Not Good), the system proceeds to a **NOTIFY D.A.T. OPERATOR OF TROUBLE** block and then to a **D.A.T. OPERATOR** (labeled **370**). If the result is **OK**, the flow continues to a **BI** (Bitmap Image of Scanned Credit Slips) block. This is followed by a funnel-shaped component **314** and a decision point **316**. If **N/G**, it leads to another **NOTIFY D.A.T. OPERATOR OF TROUBLE** block. If **OK**, it proceeds to a **CBI** (Compressed Bitmap Image of Scanned Credit Slips) block. This is followed by a funnel-shaped component **318** and a decision point **320**. If **N/G**, it leads to a **NOTIFY D.A.T. OPERATOR OF TROUBLE** block. If **OK**, it proceeds to an **ECBI** (Encrypted Compressed Bitmap Image of Scanned Credit Slips) block. This is followed by a funnel-shaped component **322** and a decision point **324**. If **N/G**, it leads to a **NOTIFY D.A.T. OPERATOR OF TROUBLE** block. If **OK**, it proceeds to a **TECBI** (Tagged Encrypted Compressed Bitmap Image of Scanned Credit Slips) block. This is followed by a funnel-shaped component **326** and a decision point **328**. If **N/G**, it leads to a **NOTIFY D.A.T. OPERATOR OF TROUBLE** block. If **OK**, the flow proceeds to a decision diamond **330**. If the result is **YES**, it leads to a **NOTIFY D.A.C. OF TROUBLE** block. If the result is **NO**, it leads to a decision diamond **338**. From **338**, if **YES**, it leads to a block **346**, then to a decision diamond **342**. If **YES** at **342**, it leads to a block **350**, then to a decision diamond **354**. If **YES** at **354**, it leads to a block **358**, then to a block **362**, then to a block **366**, and finally to an **END** block. If **NO** at **338**, it leads to a block **334**, then to a decision diamond **334**. If **OK** at **334**, it leads to a block **350**, then to a decision diamond **354**. If **NO** at **334**, it leads to a block **338**, then to a decision diamond **342**. If **NO** at **342**, it leads to a block **358**, then to a block **362**, then to a block **366**, and finally to an **END** block.

FIG. 3A

669021 664446

XEROX DATAGLYPH

OFFICE DEPOT
2110 BROAD HOLLOW ROAD
FARMINGDALE, NY 11735
516-844-0444

2.16D 9464 3305 0373 001

SALE 06/18/97 16.42

75608700053 BUSINESS PLAN PRO 89.99
MFG. LIST \$95.00

SUBTOTAL 89.99

TX 8.225% SALES TAX 7.42

TOTAL 97.41

ACCOUNT NUMBER 9999888877776666

EXPIRATION DATE 01/98

VISA 97.41

CHANGE 0.00

THANK YOU FOR SHOPPING AND SAVING AT
OFFICE DEPOT

372

370

374

376

378

380

382

384

386

388

FIG. 3B

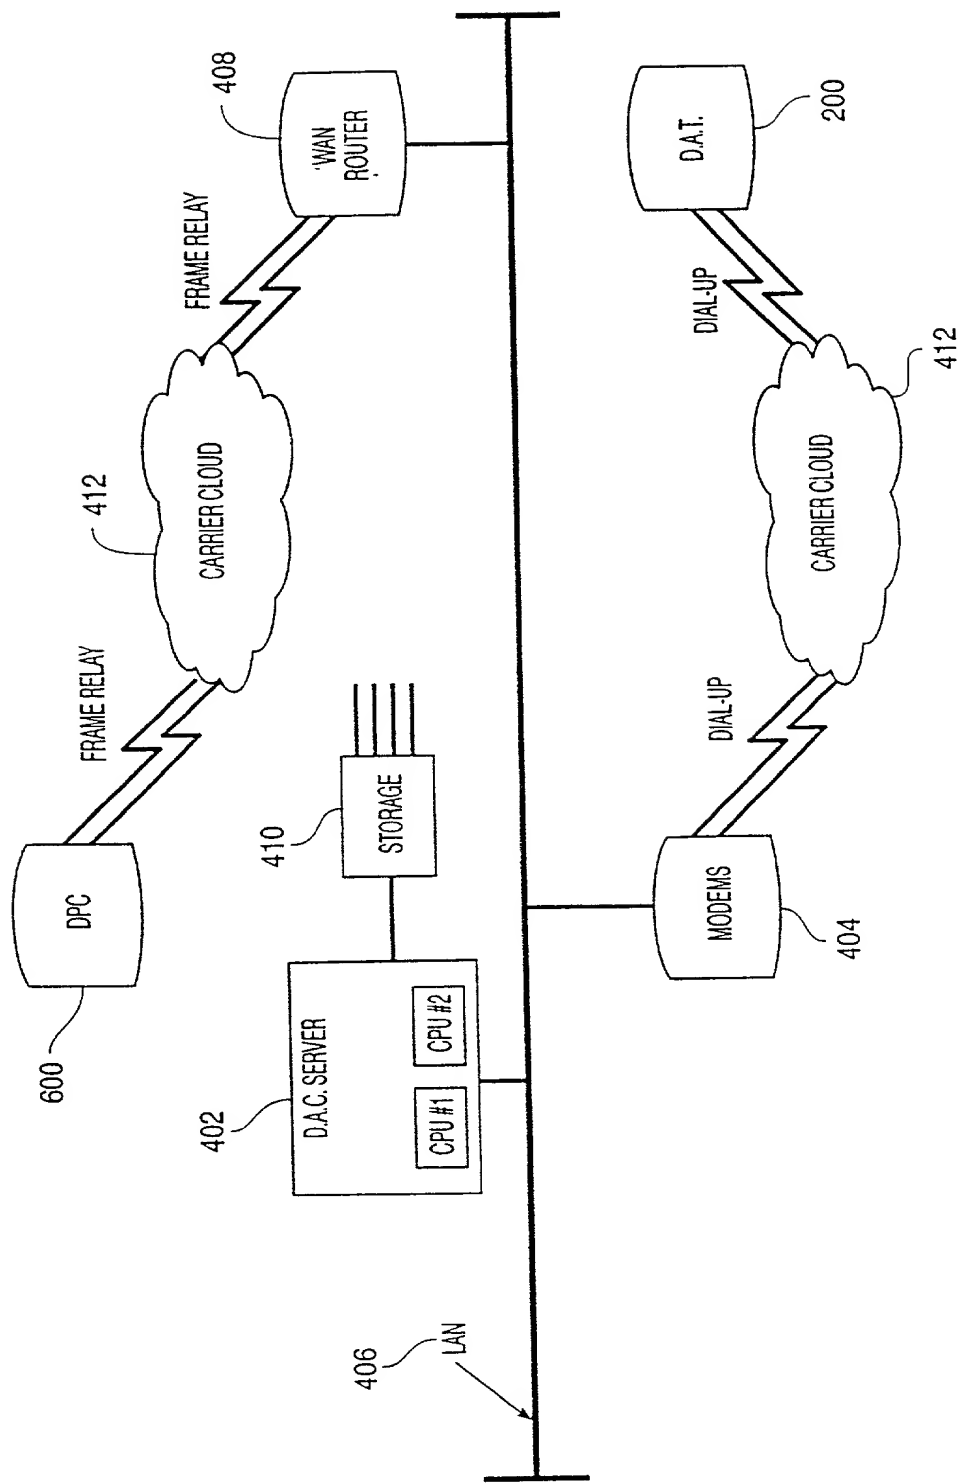


FIG. 4

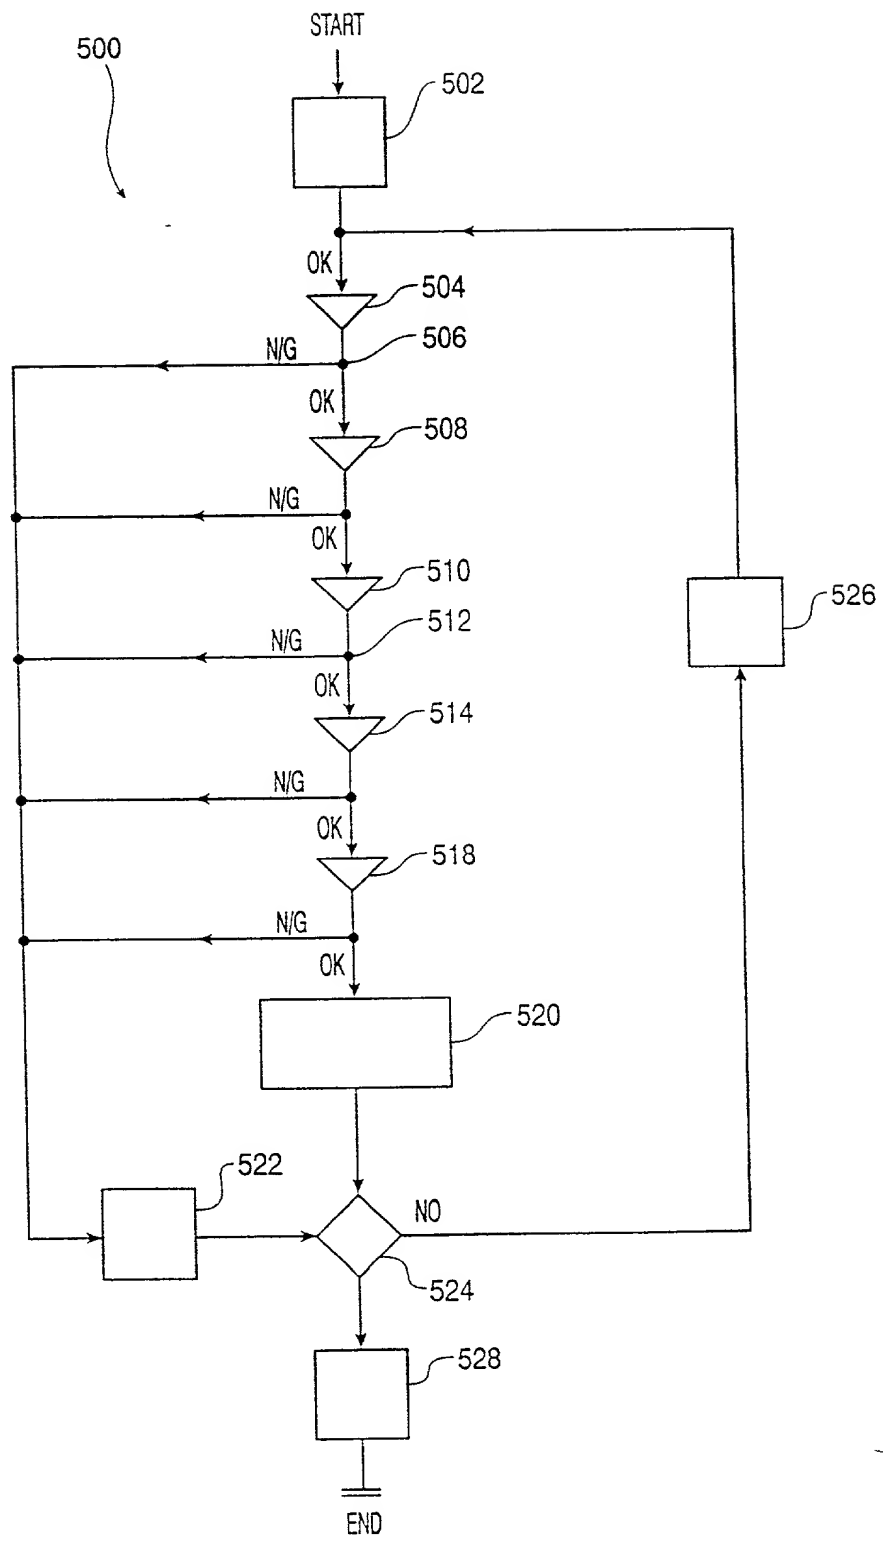


FIG. 5

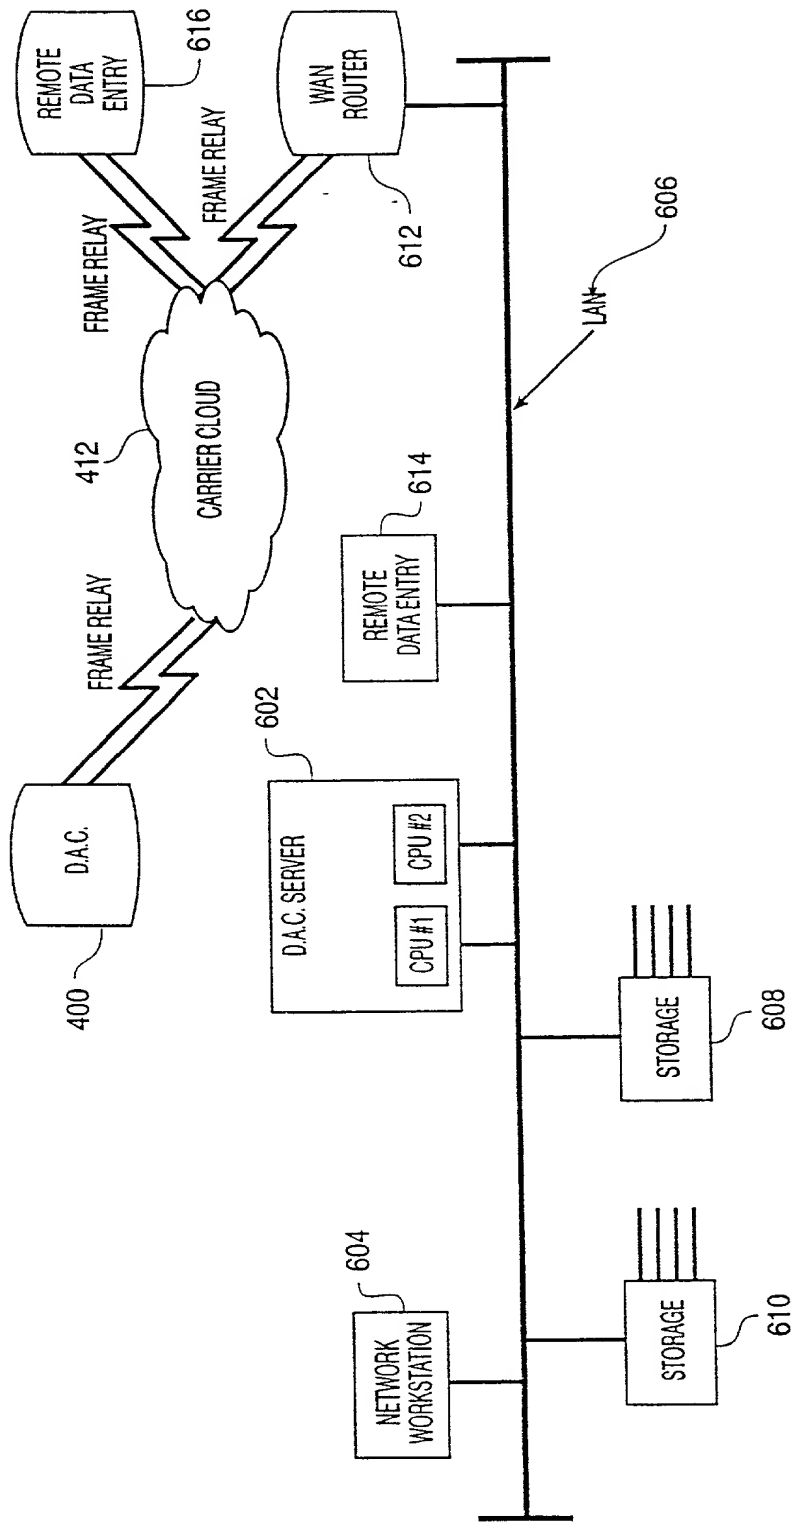


FIG. 6

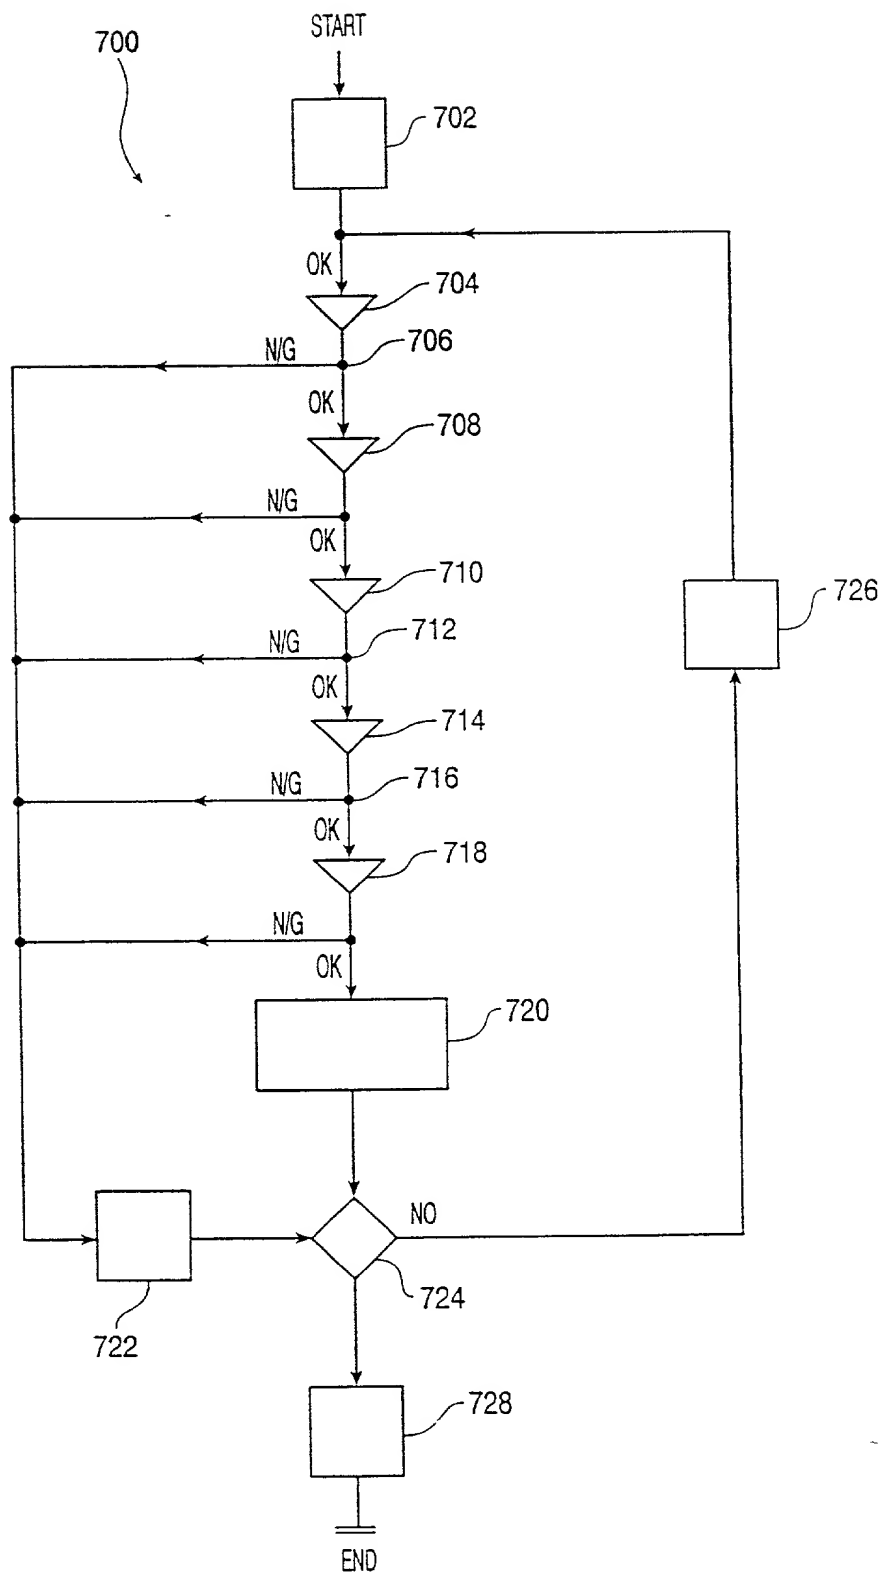


FIG. 7

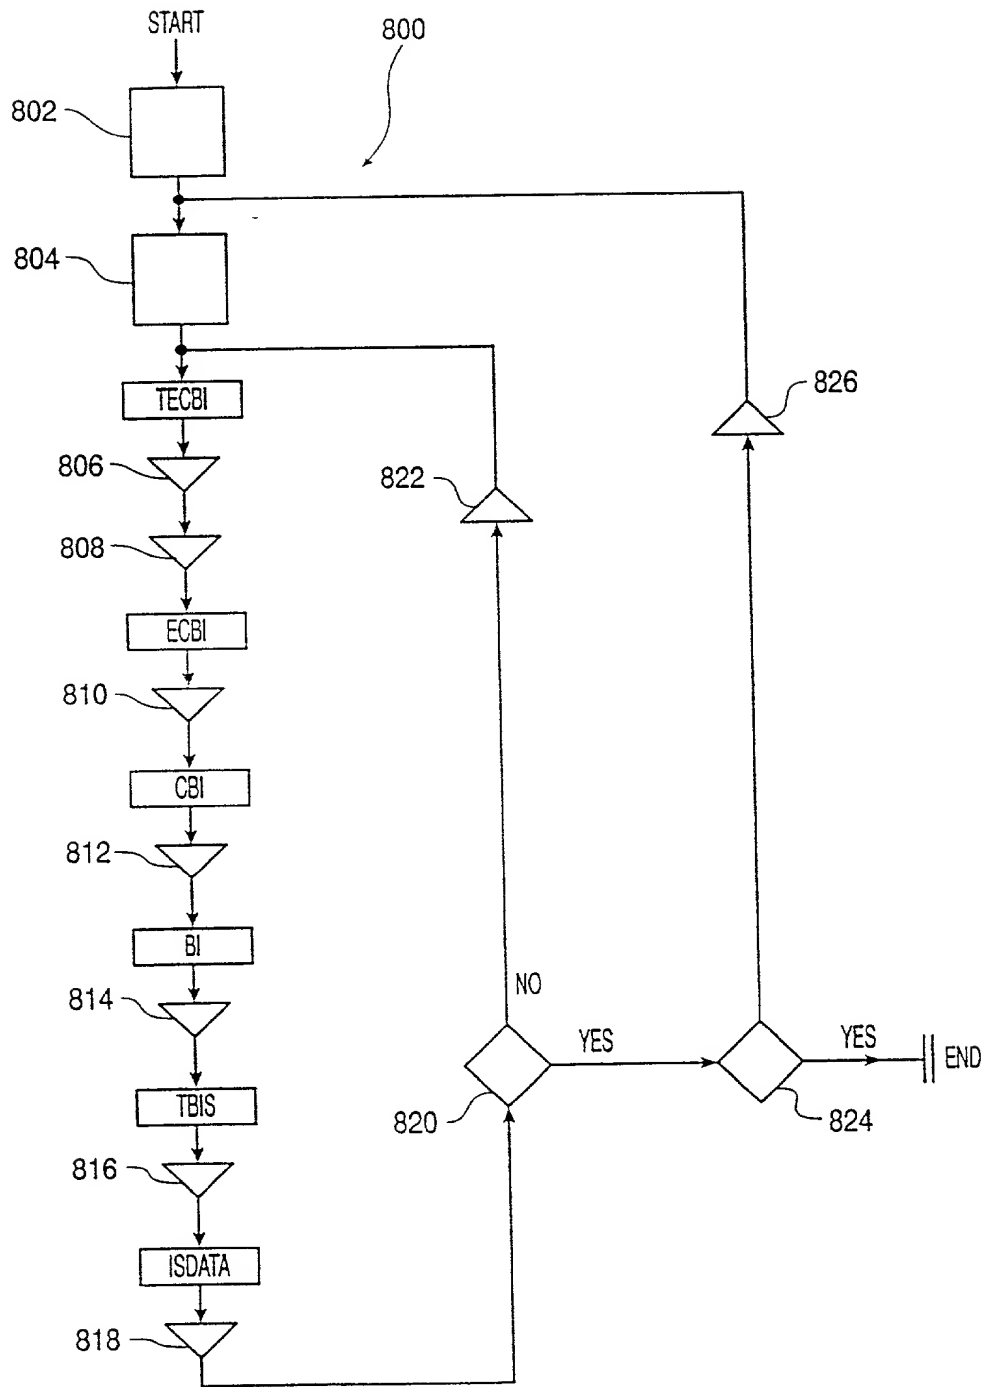


FIG. 8

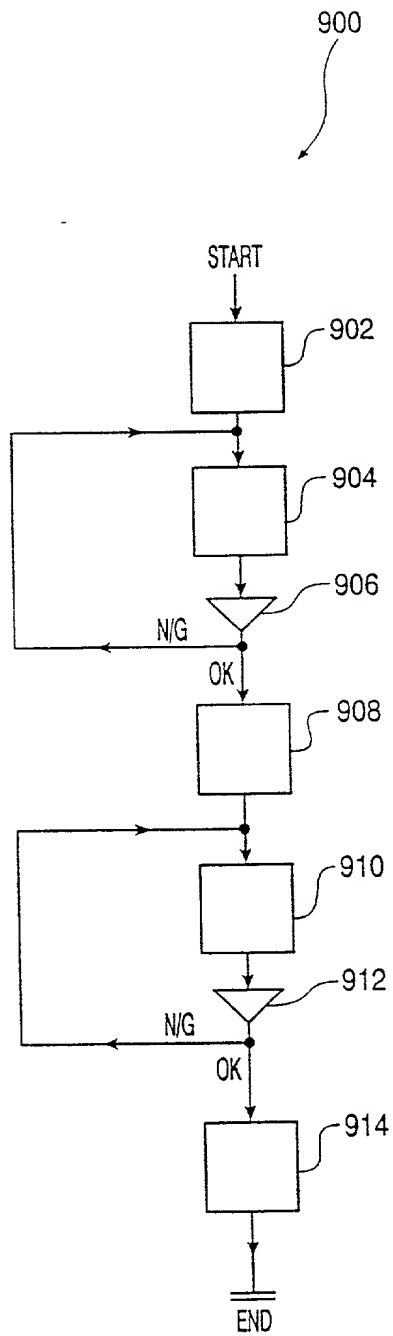


FIG. 9

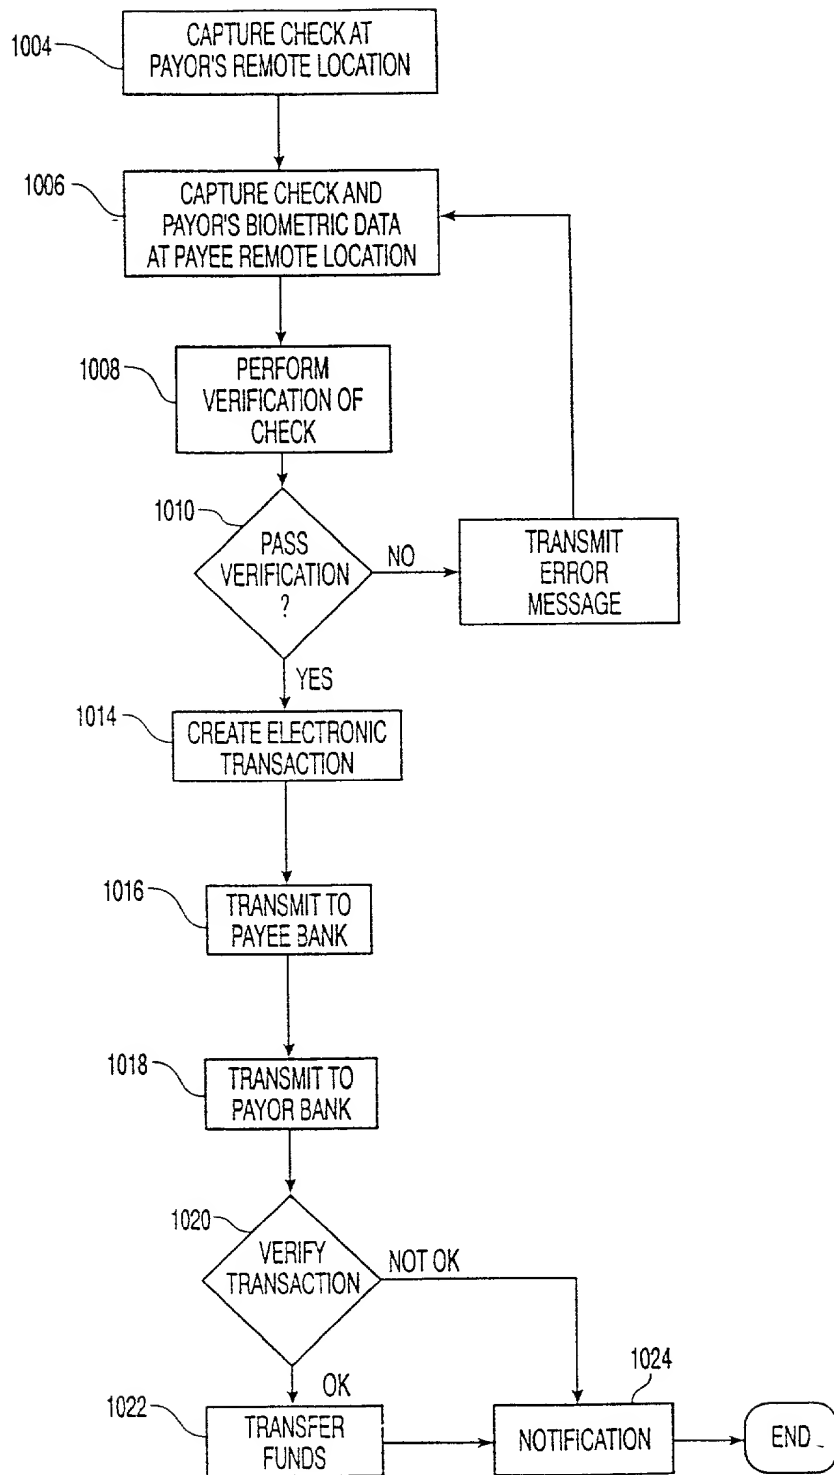


FIG. 10

**DECLARATION
AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below at 201 et seq. underneath my name.

I believe I am the original, first and sole inventor if only one name is listed at 201 below, or an original, first and joint inventor if plural name are listed at 201 et seq. below, of the subject matter which is claimed and for which a patent is sought on the invention entitled

REMOTE IMAGE CAPTURE WITH CENTRALIZED PROCESSING AND STORAGE

and for which a patent application is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, as amended by an amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED PRIOR TO THE FILING DATE OF THE APPLICATION			
APPLICATION NUMBER	COUNTRY	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
			YES <input type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	FILING DATE	STATUS		
		PATENTED	PENDING	ABANDONED
08/917,761	August 27, 1997		X	

POWER OF ATTORNEY: As a named inventor, I hereby appoint S. Leslie Misrock (Reg. No. 18872), Harry C. Jones, III (Reg. No. 20280), Berj A. Terzian (Reg. No. 20060), Gerald J. Flintoft (Reg. No. 20823), David Weild, III (Reg. No. 21094), Jonathan A. Marshall (Reg. No. 24614), Barry D. Rein (Reg. No. 22411), Stanton T. Lawrence, III (Reg. No. 25736), Isaac Jarkovsky (Reg. No. 22713), Joseph V. Colaianni (Reg. No. 20019), Charles E. McKenney (Reg. No. 22795), Philip T. Shannon (Reg. No. 24278), Francis E. Morris (Reg. No. 24615), Charles E. Miller (Reg. No. 24576), Gidon D. Stern (Reg. No. 27469), John J. Lauter, Jr. (Reg. No. 27814), Brian M. Poissant (Reg. No. 28462), Brian D. Coggio (Reg. No. 27624), Rory J. Radding (Reg. No. 28749), Stephen J. Harbulak (Reg. No. 29166), Donald J. Goodell (Reg. No. 19766), James N. Palik (Reg. No. 25510), Thomas E. Friebe (Reg. No. 29258), Laura A. Coruzzi (Reg. No. 30742), Jennifer Gordon (Reg. No. 30753), Jon R. Stark (Reg. No. 30111), Allan A. Fanucci (Reg. No. 30256), Geraldine F. Baldwin (Reg. No. 31232), Victor N. Balanc (Reg. No. 31231), Samuel B. Abrams (Reg. No. 30605), Steven I. Wallach (Reg. No. 35402), Marcia H. Sundeen (Reg. No. 30893), Paul J. Zegger (Reg. No. 33821), Edmond R. Bannon (Reg. No. 32110), Bruce J. Barker (Reg. No. 33291), Adriane M. Antler (Reg. No. 32605), Thomas G. Rowan (Reg. No. 34419), Ann L. Gisolfi (Reg. No. 31956), Mark A. Farley (Reg. No. 33170), and James G. Markey (Reg. No. 31636), all of Pennie & Edmonds LLP, whose addresses are 1155 Avenue of the Americas, New York, New York 10036, 1667 K Street N.W. Washington, DC 20006 and 3300 Hillview Avenue, Palo Alto, CA 94304, and each of them, my attorneys, to prosecute this application, as to transact all business in the Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO: PENNIE & EDMONDS LLP
1667 K STREET, N.W.
WASHINGTON, D.C. 20006

DIRECT TELEPHONE CALLS TO:
PENNIE & EDMONDS LLP DOCKETING
(202) 496-4400

201	FULL NAME OF INVENTOR	LAST NAME BALLARD	FIRST NAME Claudio	MIDDLE NAME R.
	RESIDENCE & CITIZENSHIP	CITY Lloyd Harbor	STATE OR FOREIGN COUNTRY New York	COUNTRY OF CITIZENSHIP United States
	POST OFFICE ADDRESS	STREET 16 West Neck Court	CITY Lloyd Harbor	STATE OR COUNTRY New York ZIP CODE 11743
202	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY ZIP CODE
203	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY ZIP CODE
204	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY ZIP CODE
205	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY ZIP CODE
206	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY ZIP CODE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statement may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF CLAUDIO R. BALLARD <i>Claudio R. Ballard</i>	SIGNATURE OF INVENTOR 202	SIGNATURE OF INVENTOR 203
DATE May 18, 1998	DATE	DATE
SIGNATURE OF INVENTOR 204	SIGNATURE OF INVENTOR 205	SIGNATURE OF INVENTOR 206
DATE	DATE	DATE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the patent
application of: Claudio R. Ballard

Serial No.: 08/ 917,761
Filed: August 27, 1997
Art Unit: 3642
Examiner: Carter, M.
Attorney Docket No.: 2000976-0009
For: REMOTE IMAGE CAPTURE WITH CENTRALIZED
PROCESSING AND STORAGE

Commissioner for Patents
Washington, D C 20231


SUPPLEMENTAL POWER OF ATTORNEY

Sir:

I hereby appoint J. Michael Martinez de Andino, Reg. No. 37,173, Mark A. Taylor, Reg. No. 35,706, Philip D. Lane, Reg. No. 41,140 and David E. Baker, 42,235, all attorneys of the firm of McGuire, Woods, Battle & Boothe LLP, One James Center, 901 East Cary Street, Richmond, Virginia 23219, telephone number (804) 775-1033, as supplemental attorneys to prosecute the application identified above and transact all business in the Patent and Trademark Office connected therewith.

I represent the assignee of record of the entire interest. A certificate under 37 CFR Section 3.73(b) is enclosed.

Respectfully submitted,


Claudio R. Ballard
President
CSP Holdings, LLC

Correspondence directed to
J. Michael Martinez de Andino, Esquire
McGuire Woods Battle & Boothe LLP
One James Center
901 East Cary Street
Richmond, Virginia 23219-4030
Telephone (804) 775-1033

ATTORNEY'S SUPPLEMENTAL POWER OF ATTORNEY